

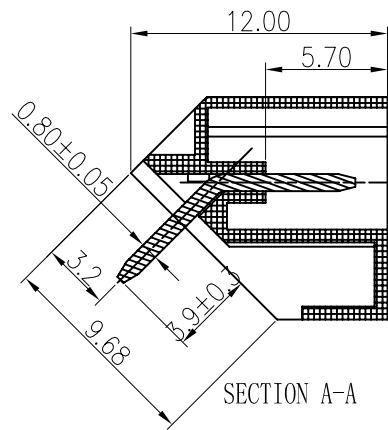
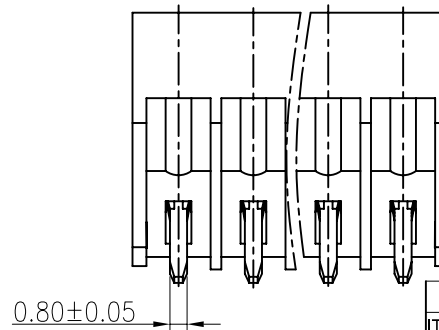
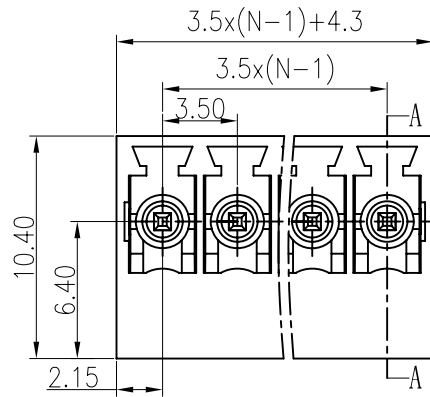



PCB LAYOUT (REF)



SECTION A-A



*线数小于或等于6P有槽, 反之没有槽;



Notes:

1. Pitch: 3.5mm, poles: 2-24p
2. Rated voltage/current: UL 300V/8A
VDE 250V/12A
3. Contact resistance: 20mΩ
4. Withstanding voltage: AC2000V/1Min
5. Insulation resistance: 5000MΩ/1000V
6. Temp. Range: -40° C~+105° C
7. MAX Soldering: +250° C, for 5 Sec
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

1	15EDGLC-3.5 座	1096A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 12/06/08"	 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD		
MM (INCH)		CHKD			
MFO		DATE			
APPVL		DATE			
MATERIAL :		G.E :	NAME		
ANGLES ± 1°		FINISH :	15EDGLC-3.5-XXP-1Y-00A (H)		
THIRD ANGLE PROJECTION		SCALE :	DRAWING NO. 15EDGLC-3.5-E01		SIZE A3
			/PART NO.		REV T2
			DO NOT SCALE DRAWING		10/14/10"
			SHEET 1		OF 1

2	15EDGLC-3.81-Pin	1096B00010 (H)	XX	Brass	Since plated
---	------------------	----------------	----	-------	--------------