
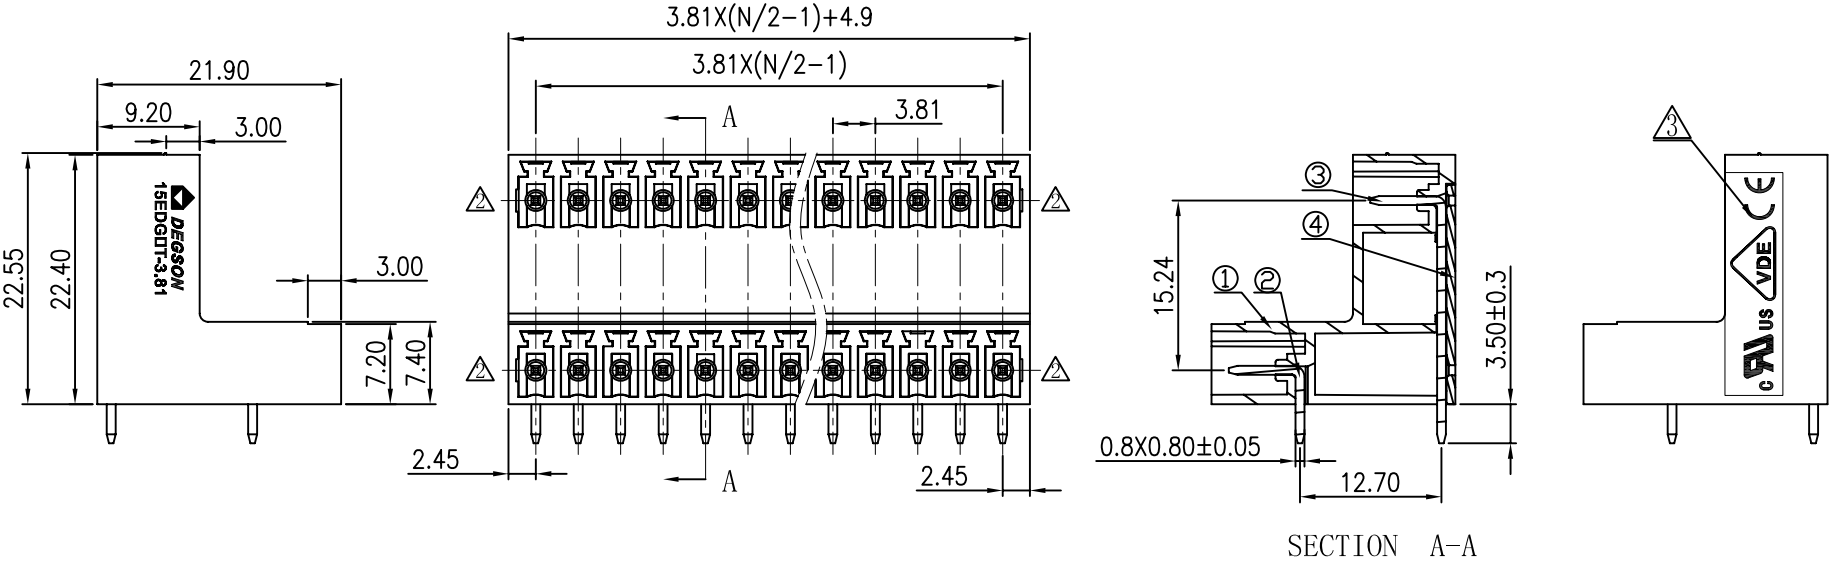




- Notes:
- 1. Pitch:3.81mm ,Poles:4-48P
 - 2. Rated voltage/current:UL 300V/8A
VDE 250V/7A
 - 3. Operation temperatures:-40℃~+105℃
 - 4. Withstanding Voltage:AC2000V/1min
 - 5. Insulation Resistance:5000MΩ/DC1000V
 - 6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							
	over 6	over 10		over 30	over 60	over 100	over 150			
to 6	to 10	to 24	to 30	to 60	to 100	to 150				
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10		

4	15EDGRT-Cover	1049COYXXA (H)	1	PA66	UL94V-0	
3	15EDGR-Pin	1003B00010 (H)	XX/2	Brass	SnCe	
2	15EDGRT-length Pin	1049B00010 (H)	XX/2	Brass	SnCe	
11	15EDGRT-Housing	1049AOYXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	 MM (INCH)		DFTD LIN	DATE 07/24/07"		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFD	DATE		
			APPVL	DATE		
			NAME			
			15EDGRT-3.81-XXP-1Y-00A(H)			
			DRAWING NO. 15EDGRT-3.81-E01		SIZE	REV
			/PART NO.		A3	T3
			DO NOT SCALE DRAWING		02/10/09"	
ANGLES ± 1°		G.E				
		FINISH:				
THIRD ANGLE PROJECTION		SCALE : 1:1		SHEET 1 OF 1		