


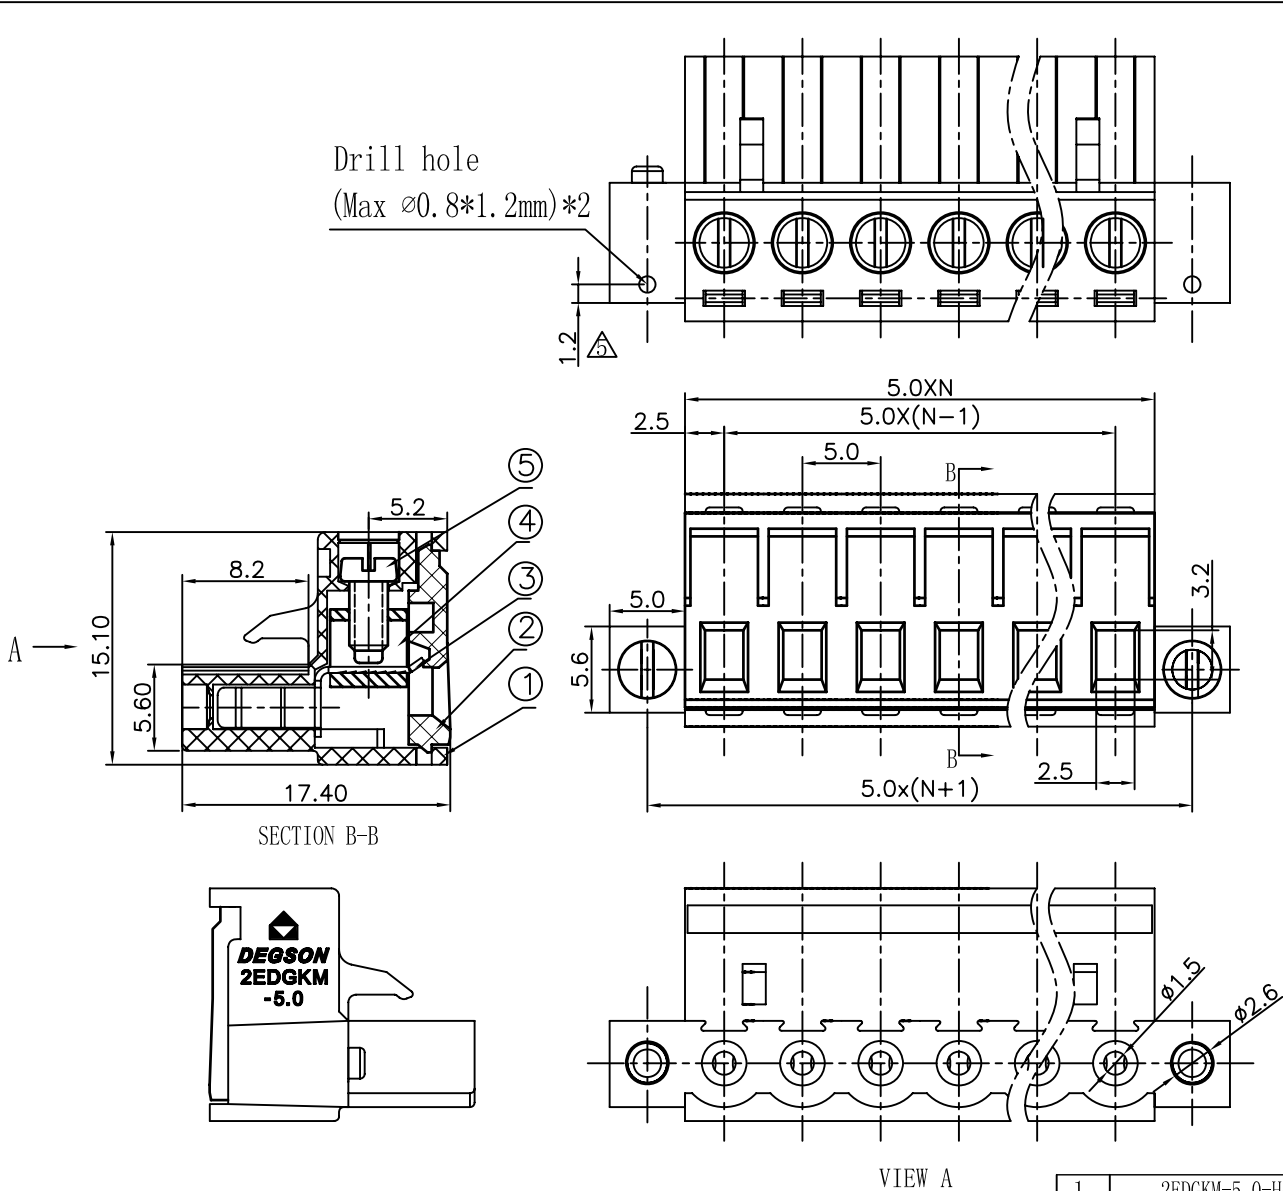

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		根据铜丝 全面改为镀金白金的铜丝, 铜丝料号由S000000020变更为S000001370	CSX	07/13/05"
△		Drawing revise	csx	04/05/06"
△		1006COYXXA→1016COYXXA	YeJ	11/29/06"
△		增加VDE、CE刻字	YeJ	02/25/08"
△		增加防脱卡点位置尺寸标注	WLM	02/06/09"

- Notes:
- 1. Pitch:5.0mm , Poles:2-24P
 - 2. Rated voltage/current:UL 300V/15A
VDE 320V/20A
 - 3. Operation temperatures:-45℃~+105℃
 - 4. Withstanding Voltage:AC2000V/1min
 - 5. Insulation Resistance:5000Ω/DC1000V
 - 6. Wire Range:28~12AWG, 2.5mm²
 - 7. Max. Torque Value:M2.5, 4.08kgf.cm
 - 8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	Q05/10

5	2EDG"—Screw-M2.5	S000001370 (H)	XX+2	Steel	Cr ³⁺ Zn
4	DG128 Brass Cage	X000000020 (H)	XX	Brass	Ni plated
3	2EDG Contact	1005B00010 (H)	XX	Phoshor Bronze	Ni plated
2	2EDGK-5.0-Cover	1016COYXXA (H)	1	PA66	UL94V-0

1	2EDGKM-5.0-Housing	1020A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Zhuwm	DATE 07/24/04	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
TOLERANCES EXCEPT AS NOTED		MFO	DATE		
TOLERANCES EXCEPT AS NOTED		APPVL	DATE		
MATERIAL :		NAME		2EDGKM-5.0-XXP-1Y-00A (H)	
ANGLES ± 1°		G.E :		DRAWING NO. 2EDGKM-5.0-E01	
THIRD ANGLE PROJECTION		FINISH :		/PART NO.	
SCALE : 1:1		DO NOT SCALE DRAWING		SHEET 1 OF 1	