




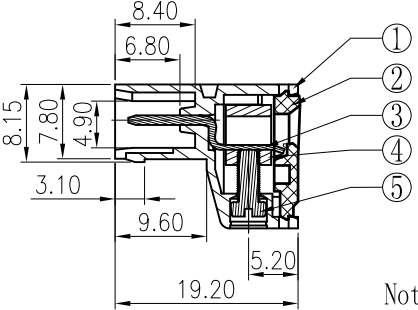


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面整理	Apple	04/07/08*
△		修改参数	LJH	09/30/08*
△		增加UL刻字	WLM	11/12/08*

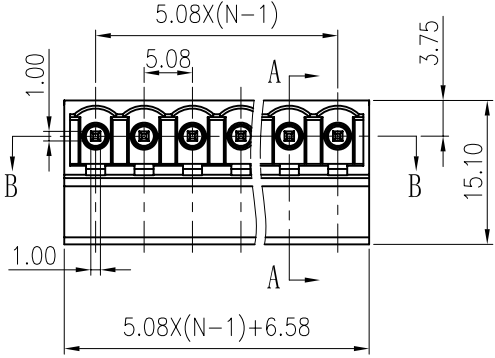


Section A-A


Section B-B

- Notes:
1. Pitch: 5.08mm , Poles: 2-24P
 2. Rated voltage/current: UL 300V/15A
IEC 320V/20A △
 3. Operation temperatures: -40℃ ~ +105℃
 4. Withstanding Voltage: AC2000V/1min
 5. Insulation Resistance: 5000MΩ / DC1000V
 6. Wire Range: 28~12AWG, 2.5mm² △
 7. Max. Torque Value: M2.5, 4.08Kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

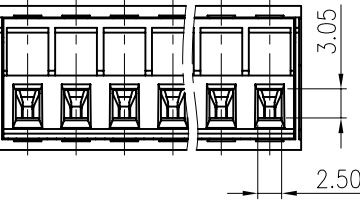

5	2EDG "—" Screws-M2.5	S000001370 (H)	XX	Steel	Cr ³⁺ Zn
4	DG128 Brass cage	X000000020 (H)	XX	Brass	Ni plated
3	2EDGKR-Pin	1159B00010 (H)	XX	Copper	SnCe

2	2EDGK-5.08-Cover	1005COYXXA (H)	1	PA66	UL94V-0											
1	2EDGKR-5.08-Housing	1159AOYXXA (H)	1	PA66	UL94V-0											
ITEM		NAME OF PART		NO. OF PART	Q"TY	MATERIAL	NOTES									
DETACHED LISTS	 MM (INCH)		DFTO Yangys		DATE 03/16/08*											
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE											
			MFO		DATE											
			APPVL		DATE											
	<table border="1"><tr><td>MM</td><td></td></tr><tr><td>.0 ±</td><td>±</td></tr><tr><td>.00 ±</td><td>±</td></tr><tr><td>.000 ±</td><td>±</td></tr></table>		MM		.0 ±	±	.00 ±	±	.000 ±	±	MATERIAL :		NAME 2EDGKR-5.08-XXP-1Y-00A (H)			
			MM													
			.0 ±	±												
	.00 ±	±														
	.000 ±	±														
ANGLES ± 1°		G.E :		DRAWING NO. 2EDGKR-5.08-E01				SIZE A3	REV T3 11/12/08*							
		FINISH :														
THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING				SHEET 1	OF 1							