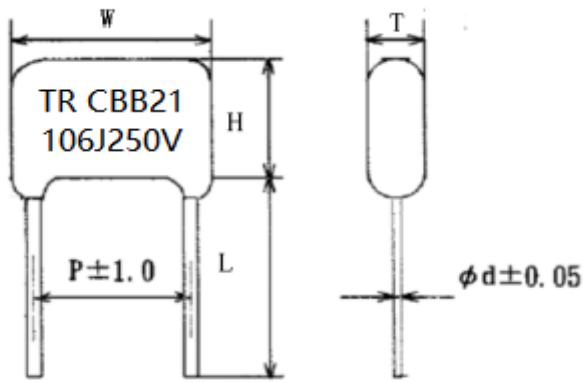


Customer: TRIATRON		Customer'S		P/N: 239647		JGS" S		P/N:CBB21 106J250V P27.5 MM (JGS43106J2EL27LL)							
Capacitance 容量	@ 1KHZ 23°C±3°C	Tolerance 误差	±5%	Rated Voltage 额定电压	@ 25°C 50/60HZ		DRAWING &MARKING	Protection/Coating 外封装		Flame retardant epoxy resin (UL94V-0)					
	10μF				250VDC			Resin filled 灌封							
Dielectric 介质	Polypropylene film	Plates 导体	Metallized film	Construction 结构	Winding			Lead Wire 导线		Φ 0.8 Copper wire					
Dissipation Factor 损失角	@ 1K HZ 1Vrms 25°C max		50~60HZ					Colour 颜色		red					
			1KHZ	0,10%											
			10KHZ	0,15%											
			150KHZ												
Test Voltage 测试电压	1.6 times of rated voltage for 5 seconds cut off current at 10mA		DC lead to lead	400VDC			 Laser printing 单位: mm								
			DC lead to case	VDC											
			AC lead to lead	VAC											
			AC lead to case	VAC											
Dielectric Withstanding Voltage 介质耐压强度	Between terminals 400VDCx 200% 1To 5 sec max			500VDC											
Insulation Resistance 绝缘阻抗	20°C@ 100 VDC 60 seconds min		Lead to lead	>5000 MΩ/uf											
	20°C@VDC..... seconds min		Lead to case	MΩ											
dv/dt 单位时间电压变化率	max		Max pulse rise time	(v/sec)											
IpeakA 最大值电流	@70°C			Amps											
IrsmA 实效值电流	@70°C			Amps											
Surge/Pulse voltage 冲击电压	140% rated voltage max			VDC											
E.S.R 等效串联阻联阻抗值			Standard 依循标准	IEC60384-14											
Safety approval安规认证			Dimension(尺寸)mm												
			W±0.5	H±0.5	T±0.5	P±1									
			29,0	25,6	15,9	27,5									
			dø±0.05	L0±3											
			0.8 Cu	25,0											
Remark 备注: RoHS			Confirmation area 客户承认签回区			Operating Temperature 工作温度范围 From Minus -40 °C to Plus +105°C					Designer 设计师 丁亚维	Design code 设计代码: CBB21 106J250VDC P27.5MM(JGS43106J2EL27LL)			
						DATE 日期: 2024-07-19									
						3RD ANGLE PROJECTION 第三角法					Drawing 绘图员 陈晓玉	Approval 核准	Drawing NO.		
						SCALE	~	UNIT	mm						

单位: mm