
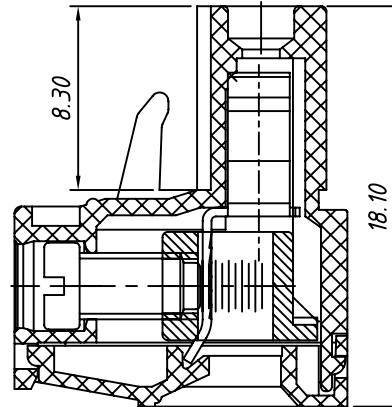


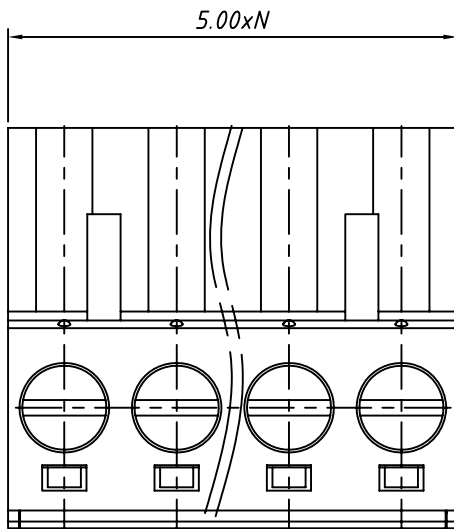

SECTION A-A

Material

Housing: PA66, UL94V-0
Cage: Brass, Nickel plated
Clamp: Phosphor Bronze, Nickel plated
Screw: M3.0 steel, Zn plated

Electrical

Rated voltage: 300V
Rated current: 15A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 28~14AWG/2.5mm²


Mechanical

Temp. Range: -40 °C ~ +105 °C
Strip length: 7~8mm
Torque: 5.1kgf-cm(0.5Nm/4.43Lbin)

Order Information



L-KLS2-EDK -5.00-XXP-4 S XX

RoHS —
Terminal Block —
Pitch —
No.: of Pole —
Color: 4- Green —
Screw: S- Slot Screw C- Cross Screw
Product Code: 00~99 —

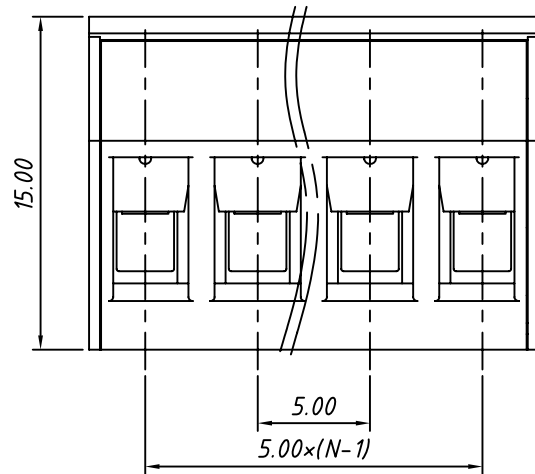

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ±0.60		X. ±5°		UNITS	mm	Plug-in TERM BLOCK 5.00MM
.X ±0.38		.X ±3°		SHEET SIZE	A4	
.XX ±0.25		.XX ±2°			KLS P/N:	
Draw by: Date		2015-09-01		KLS ELECTRONIC CO., LTD.		
Check by: Date		2015-09-15				
SCALE		SHEET				

KLS ELECTRONIC CO., LTD.

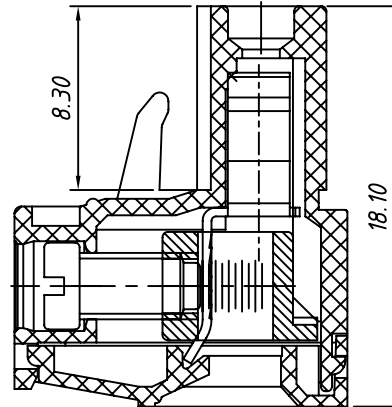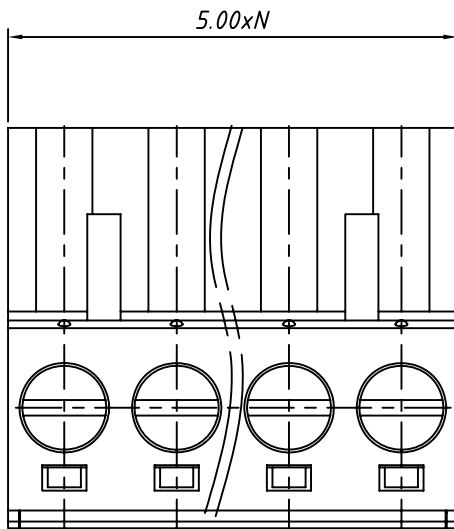

SECTION A-A

Material

Housing: PA66, UL 94 V-0
Cage: Iron, Nickel plated
Clamp: Phosphor Bronze, Nickel plated
Screw: M3.0 steel, Zn plated

Electrical

Rated voltage: 300V
Rated current: 15A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 28~14AWG/2.5mm²


Mechanical

Temp. Range: -40 °C ~ +105 °C
Strip length: 7~8mm
Torque: 5.1kgf-cm(0.5Nm/4.43Lbin)

Order Information



L-KLS2-EDK -5.00-XXP-4 S XX

RoHS —
Terminal Block —
Pitch —
No.: of Pole —
Color: 4- Green —
Screw: S- Slot Screw C- Cross Screw
Product Code: 00~99 —

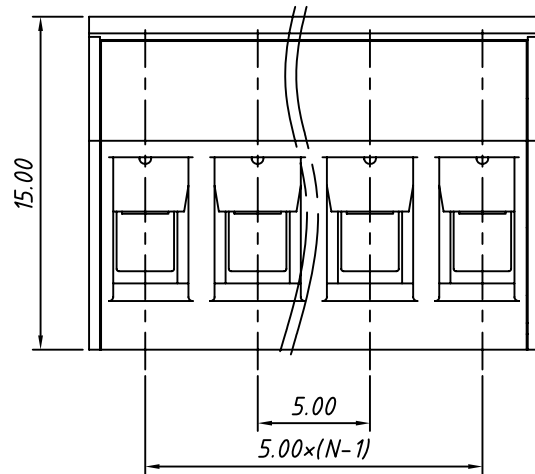


GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		Description:
X. ±0.60	X. ±5°	UNITS	mm	Plug-in TERM BLOCK 5.00MM(Iron)
.X ±0.38	.X ±3°	SHEET SIZE	A4	
.XX ±0.25	.XX ±2°		KLS P/N:	
				KLS2-EDK-5.00-XXP-4X

KLS ELECTRONIC CO., LTD.

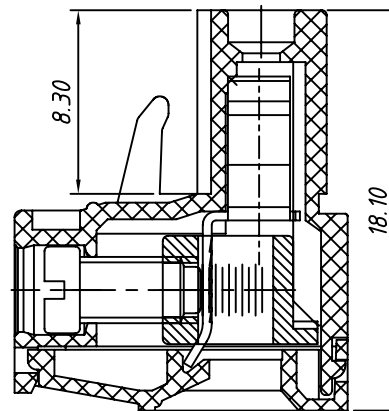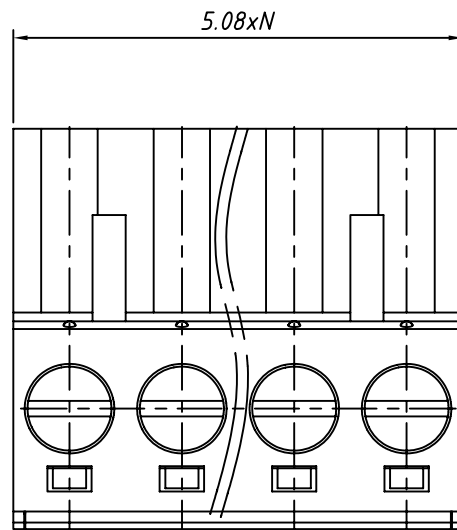

SECTION A-A

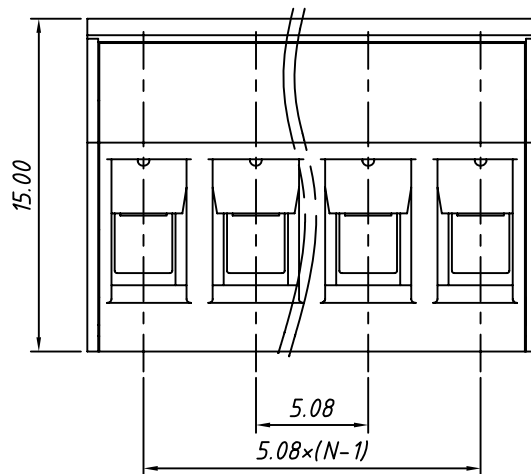

Material

Housing: PA66, UL 94V-0
Cage: Brass, Nickel plated
Clamp: Phosphor Bronze, Nickel plated
Screw: M3.0 steel, Zn plated

Electrical

Rated voltage: 300V
Rated current: 15A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 28~14AWG/2.5mm²

Mechanical

Temp. Range: -40 °C ~ +105 °C
Strip length: 7~8mm
Torque: 5.1kgf-cm(0.5Nm/4.43Lbin)



Order Information

L-KLS2-EDK -5.00-XXP-4 S XX


RoHS —
Terminal Block —
Pitch —
No.: of Pole —
Color: 4- Green —
Screw: S- Slot Screw C- Cross Screw
Product Code: 00~99 —

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ±0.60		X. ±5°		UNITS	mm	Plug-in TERM BLOCK 5.08MM
.X ±0.38		.X ±3°		SHEET SIZE	A4	
.XX ±0.25		.XX ±2°			KLS P/N:	
Draw by: Date		2015-09-01		KLS ELECTRONIC CO ., LTD.		
Check by:: Date		2015-09-15				
SCALE		SHEET				

KLS ELECTRONIC CO., LTD.

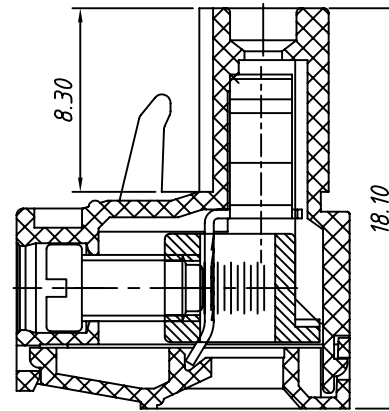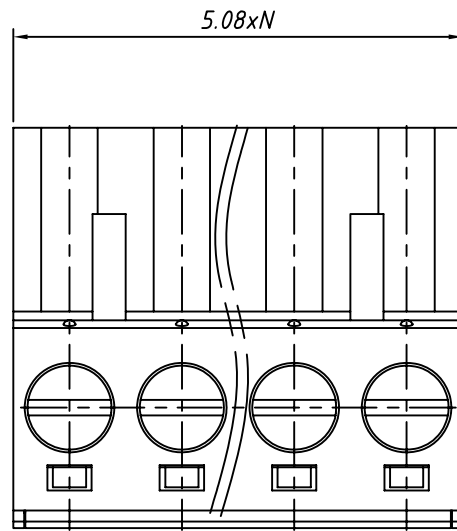

SECTION A-A

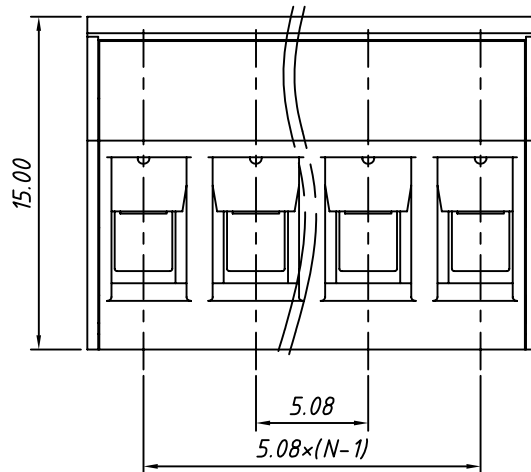

Material

Housing: PA66, UL 94V-0
Cage: Iron, Nickel plated
Clamp: Phosphor Bronze, Nickel plated
Screw: M3.0 steel, Zn plated

Electrical

Rated voltage: 300V
Rated current: 15A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 28~14AWG/2.5mm²

Mechanical

Temp. Range: -40 °C ~ +105 °C
Strip length: 7~8mm
Torque: 5.1kgf-cm(0.5Nm/4.43Lbin)

Order Information

L-KLS2-EDK -5.00-XXP-4 S XX

RoHS —
Terminal Block —
Pitch —
No.: of Pole —
Color: 4- Green —
Screw: S- Slot Screw C- Cross Screw
Product Code: 00~99 —

GENERAL TOLERANCE			ANGLE TOLERANCE			PROJECTION			Description:		
X. ±0.60			X. ±5°			UNITS		mm		Plug-in TERM BLOCK 5.08MM(Iron)	
.X ±0.38			.X ±3°			SHEET SIZE		A4			
.XX ±0.25			.XX ±2°					KLS P/N:			
Draw by: Date		2015-09-01					KLS ELECTRONIC CO., LTD.				
Check by:: Date		2015-09-15									
SCALE			SHEET			OF					
KLS P/N: KLS2-EDK-5.08-XXP-4X											