




PCB LAYOUT

S=2.5:1


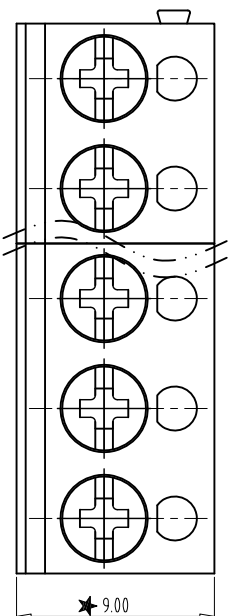


NOTES:

1. Rating: 300V 12A
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: 500MΩ or more at DC500V
4. Using Temperature Range: -40°C--+105°C
5. Screw Torque Value: 0.5N.m
6. Suitable Electric Wire: 22-14AWG
7. "★" is the important dimension.
8. Housing: PBT (UL94-V0);
9. Pin header: Brass, Ni plated;
10. Screw: Steel, Zinc plated;
11. Shrapnel: Stainless steel;

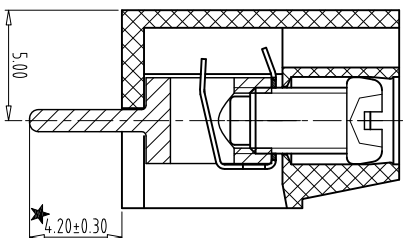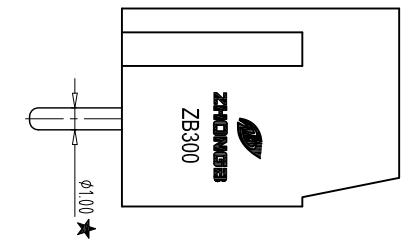

SECTION:A-A

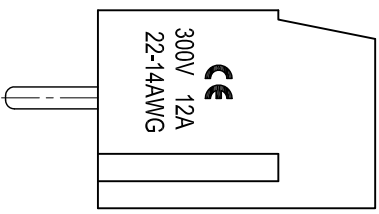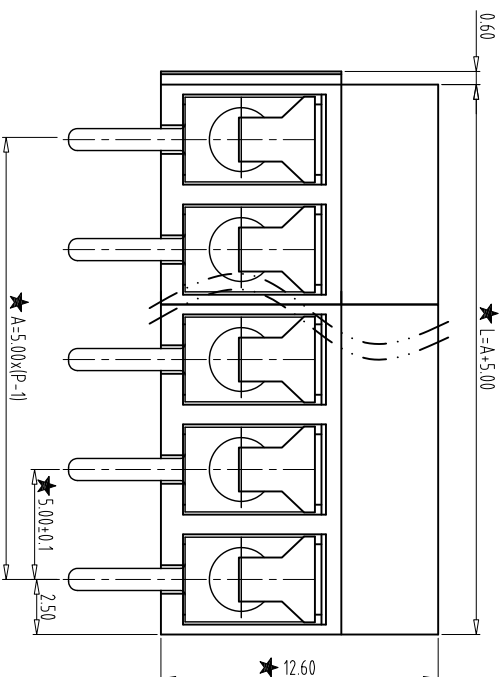

A	Total Pitch Tolerances in mm	Nominal, dimension range in mm	— //
---	---------------------------------	-----------------------------------	---------

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL		NOTE	
				mm	SHEET/OF	1 / 1	
DWG	SK	DATE	14.05.27				
CHK		DATE		3 : 1	A4		
APP.		DATE					
				NAME			
				ZB104V-XXP-XC(ZB300-5.0)			