






6			5			4			3			2			1								
FILE: ZB02/												REV			CONTENT			CHK			DATE		
												V2.0			品名數字修正			CXL			14.08.26		

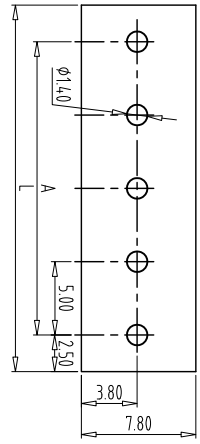


PCB LAYOUT
S=2:1

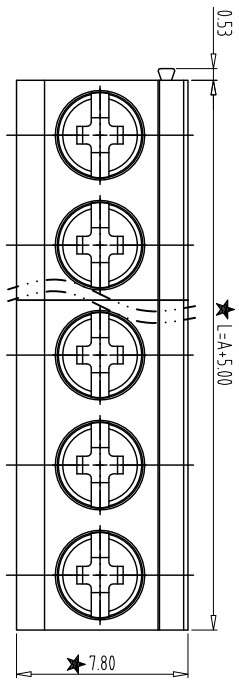

- NOTES:
1. Rating:300V 10A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40℃/+105℃
 5. Screw Torque Vlaue:0.4Nm
 6. Suitable Electric Wire: 14-22AWG
 - 7:“★” is the important dimension;
 8. RoHS Compliance.

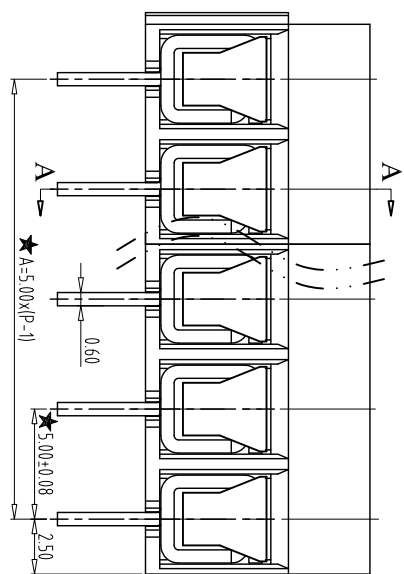

SECTION:A-A



A		Total Pitch Tolerances										Nominal dimension range										—		//																							
		in mm										in mm																																			
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over																						
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over	0	over	0	100	over																							
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to	150																							
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10		100		100	150																								
±0.18		±0.20		±0.25		±0.3		±0.35		±0.44		±0.60		±0.70		±0.85		±0.20		±0.25		±0.30		±0.35		±0.44		±0.55		±0.70		±0.80		±0.90		0.2		0.3		0.3		0.2		0.3		0.5	

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	HUTA0	DATE	13.09.26	SIZE	A4	UNITS	mm
CHK.		DATE		SCALE	3 : 1		126-5.0
APP.		DATE					
NINGBO ZHONGBO PHOTOVOLTALIC TECHNOLOGY CO., LTD				DWGNO.	ZB-02-ZB126VXXPC		
NINGBO ZHONGBO PHOTOVOLTALIC TECHNOLOGY CO., LTD				NAME	ZB126V-XXP-XC		