

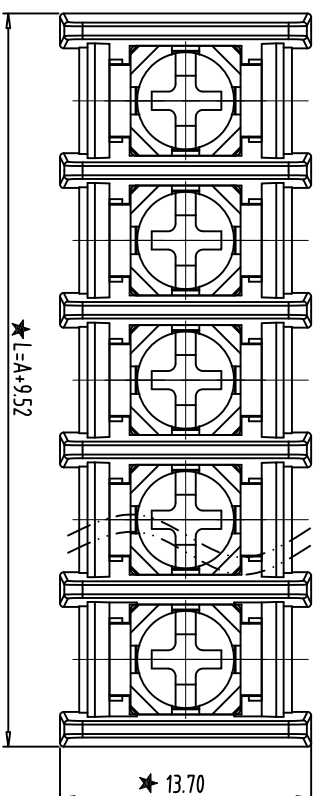
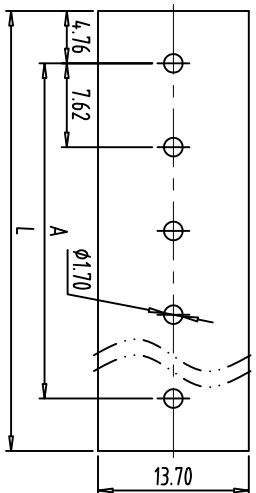
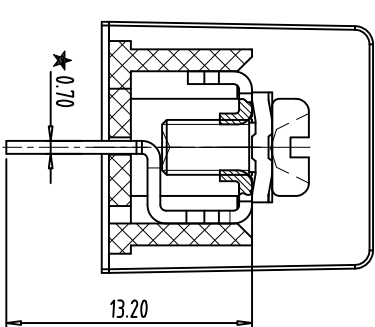


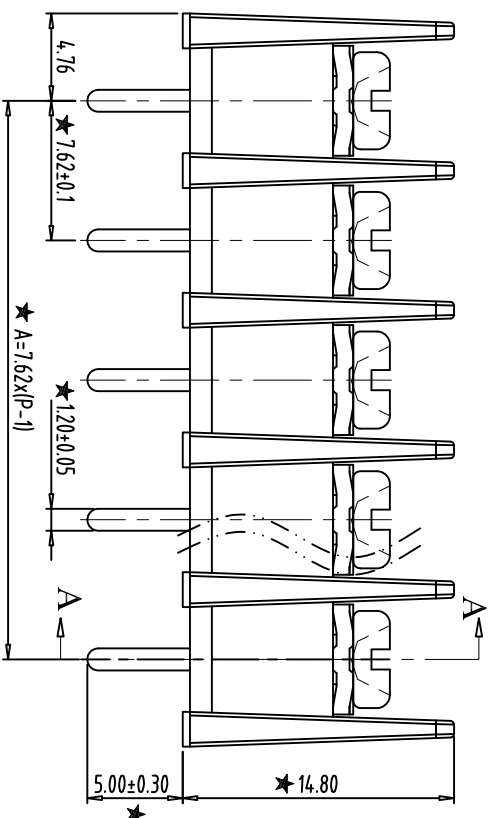

- NOTES:
1. Rating:300V 20A;
 2. Insulation Withstands Voltage:
AC2000V/MIN
 3. Insulation Resistance:
500M Ω or more at DC500V
 4. Using Temperature Range:
-40°C/+105°C
 5. Screw Torque Value:0.5Nm
 6. Suitable Electric Wire: 14-22AWG
 7. ★" the important dimension.

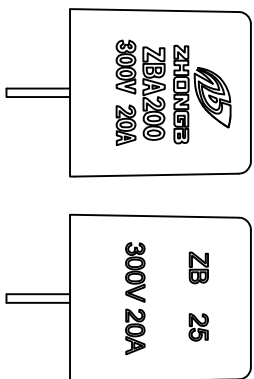

A	Total Pitch Tolerances	Nominal dimension range	$\pm$	$-$	$//$
---	------------------------	-------------------------	-------	-----	------

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	ZX	DATE 2020.05.15	SIZE	A4	UNITS mm	SHEET/OF 1/1
CHK.	DATE		SCALE	2.5:1		ZB25
APP.	DATE		ZBA200-XP-C			
DWGNO.			ZB-02-ZBA200XP-C			