

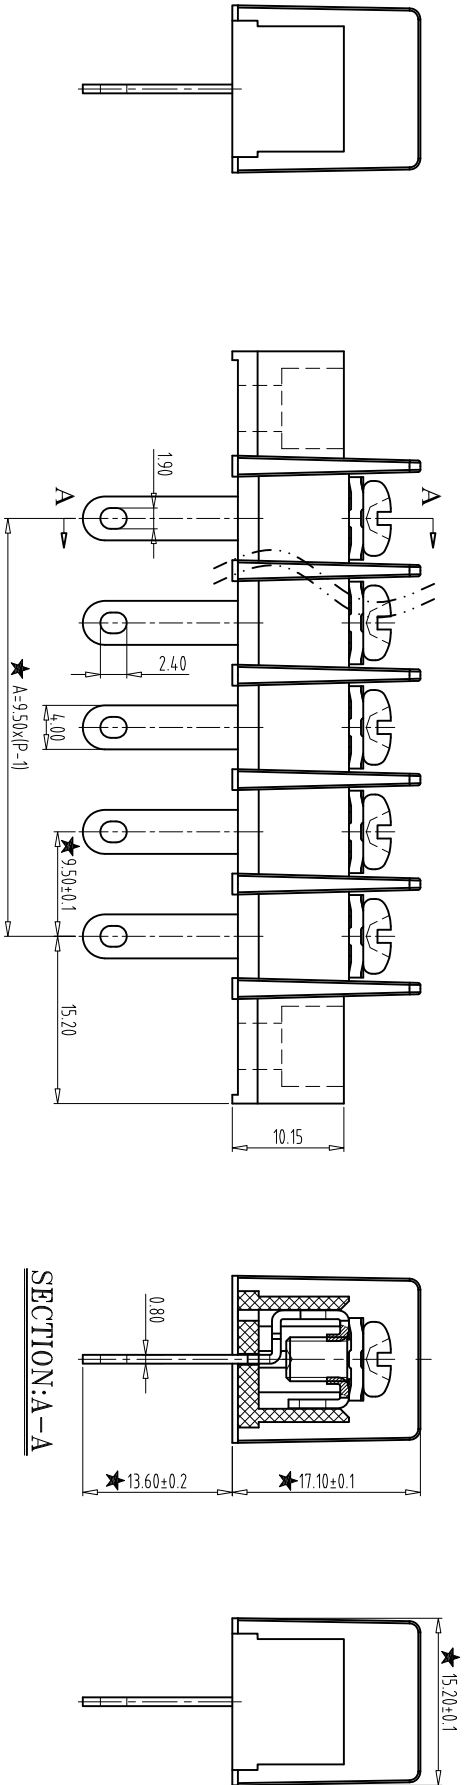


6		5		4		3		2		1	
FILE ZB02/ZBA/ZB502/ZBA502HW-XXP-XC						REV		CONTENT		CHK DATE	
						V0.0		CONTENT		SK 14.06.07	

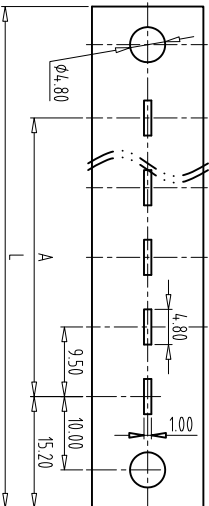

- NOTES:
1. Rating:300V 20A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C/+105°C
 5. Screw Torque Value:1.2Nm
 6. Suitable Electric Wire: 12-22AWG
 - 7, "★" the important dimension.

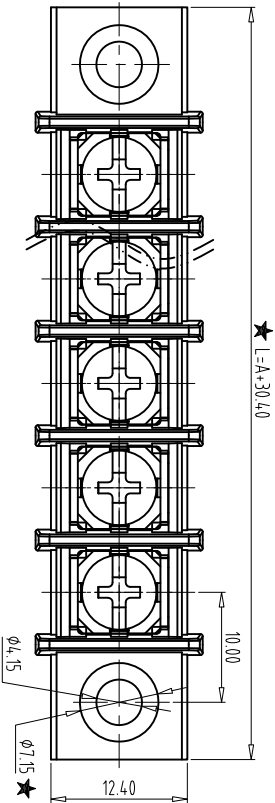

PCB LAYOUT
S=3:2

A											
Total Pitch Tolerances in mm						Nominal dimension range in mm					
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
3	SOLDER PIN	ZA502B0008	P	BRASS	Tin Plated
2	SCREW	ZBST0004	P	STEEL	M4/Ni Plated
1	HOUSING	ZA502A1XXXXX	1	PA66	
DWG.	SK	DATE	14.06.07	UNITS	mm
CHK.		DATE		SCALE	1:5 A4
APP.		DATE		NAME	ZBA502HM-XXP-XC(ZB45宽脚)
				DWGNO.	ZB-02-ZBA502HMXXPXC