

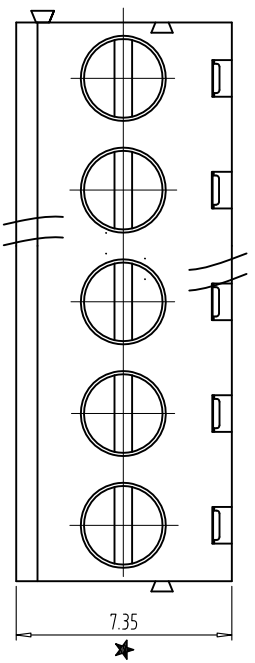
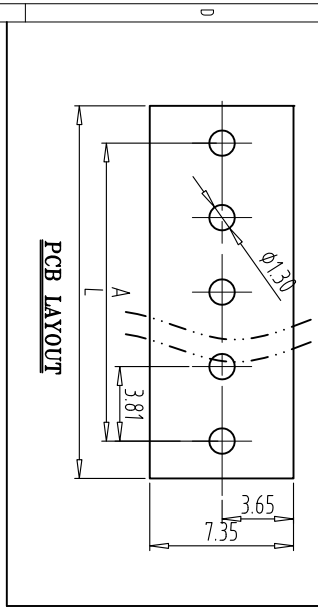
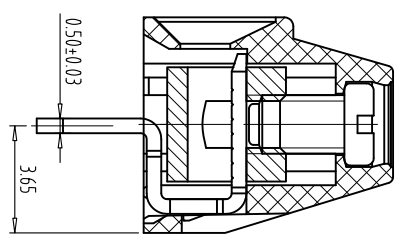



FILE:		6	5	4	3	2	1
REV		CONTENT		CHK	DATE		

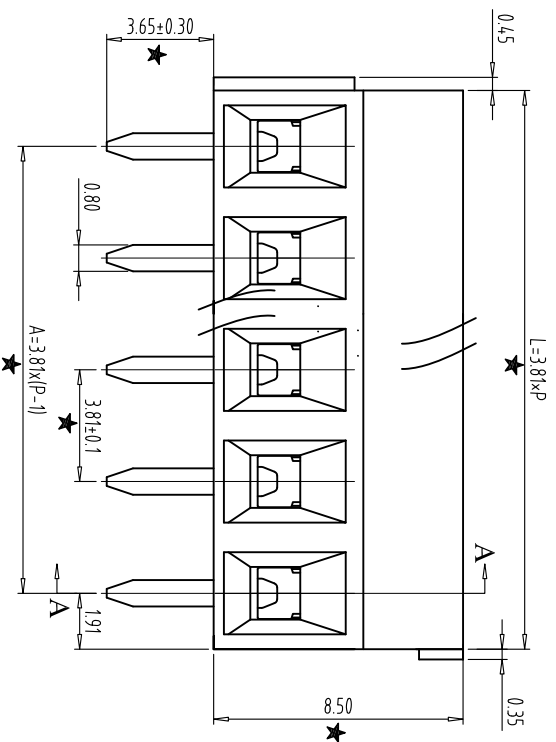

- NOTES:
1. Rating:150V 10A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500M Ω or more at DC500V
 4. Using Temperature Range: -40 $^{\circ}$ C—+105 $^{\circ}$ C
 5. Screw Torque Value:0.2N.m
 6. Suitable Electric Wire: 26-16AWG
 7. "★" is the important dimension.

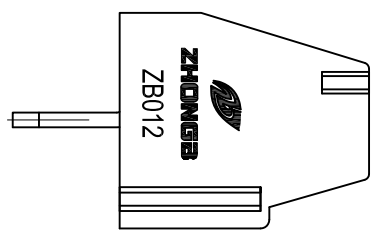

SECTION:A-A

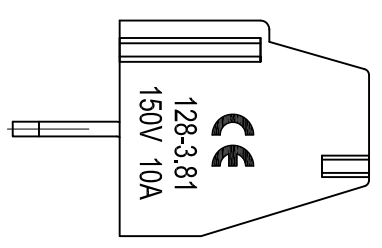

Total Pitch Tolerances											
in mm											
over	0	30	53	70	90	115	150	250	350	500	6
to	0	30	53	70	90	115	150	250	350	500	6
to	0	30	53	70	90	115	150	250	350	500	6
to	0	30	53	70	90	115	150	250	350	500	6
to	0	30	53	70	90	115	150	250	350	500	6
to	0	30	53	70	90	115	150	250	350	500	6
to	0	30	53	70	90	115	150	250	350	500	6
to	0	30	53	70	90	115	150	250	350	500	6
to	0	30	53	70	90	115	150	250	350	500	6
to	0	30	53	70	90	115	150	250	350	500	6
to	0	30	53	70	90	115	150	250	350	500	6

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	SIZE	A4	128V-3.81
CHK	DATE	SCALE	4:1	mm	128V-3.81
APP.	DATE	NAME	ZB012V-XP-XS		
			DWGNO.	ZB-02-ZB012VXXPS	