
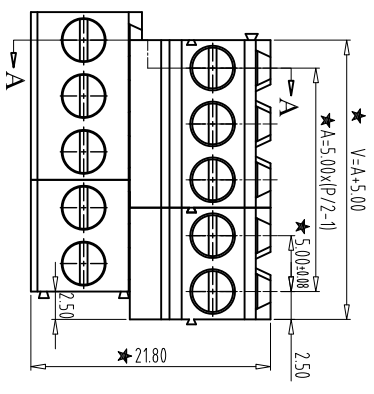
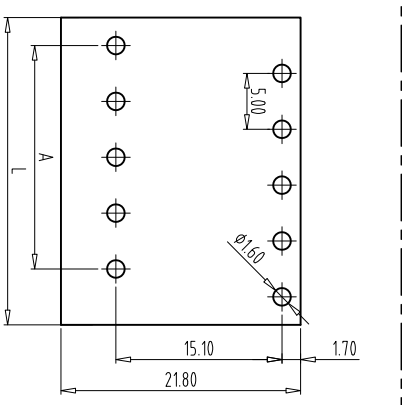

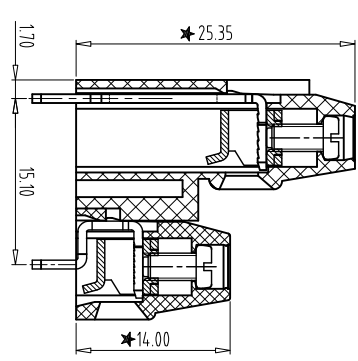
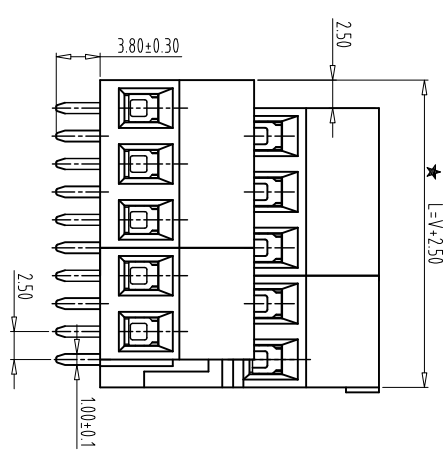




PCB LAYOUT

Total Pitch Tolerances										Nominal dimension range													
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all				
53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	100	150				
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5
6										5										4			

- NOTES:
1. Rating:300V 10A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: ≥500MΩ or more at DC500V
 4. Using Temperature Range: -40°C/+105°C
 5. Screw Torque Vaue:0.4N.m
 6. Suitable Electric Wire: 16-26AWG
 - 7, "★" the important dimension.

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	14.05.23	SIZE	A4
CHK		DATE		SCALE	1:1
APP.		DATE		NAME	ZB128H LB-XP-XS
		DWGNO.	ZB-02-ZB128BXXPXS		