

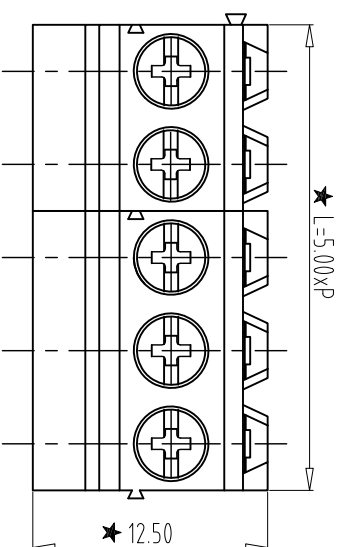


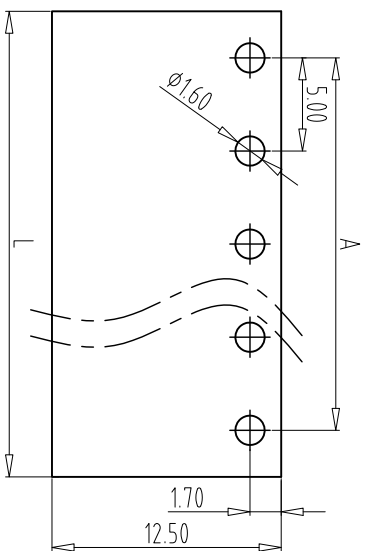

NOTES:

1. Rating:300V 16A;
 2. Insulation Withstands Voltage: AC2000V/MIN;
 3. Insulation Resistance: 500M Ω or more at DC500V
 4. Using Temperature Range: -40°C/+105°C;
 5. Screw Torque Value:0.4N.m;
 6. Suitable Electric Wire: 12-24AWG .
7. "★" is critical dimension to be controlled.

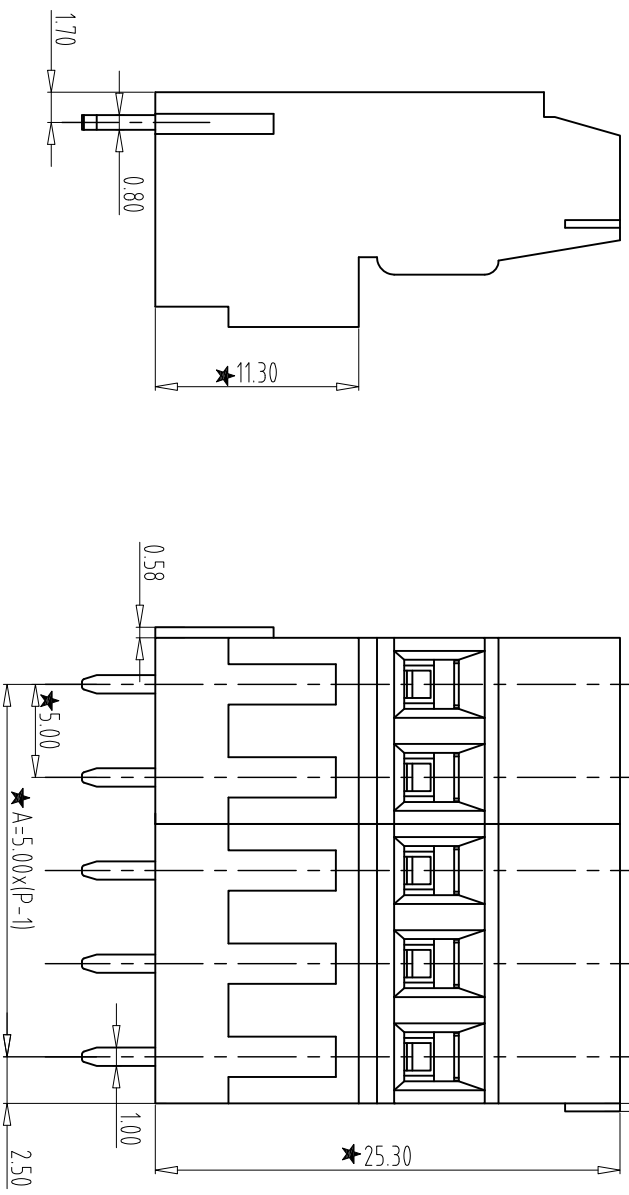

A	Total Pitch Tolerances	Nominal dimension range	$\pm$	$-$	$//$
---	------------------------	-------------------------	-------	-----	------

[illegible]

ITEM	NAME OF PART		NO. OF PART	Q-TY	MATERIAL		NOTE
DWG.	SK	DATE		SIZE	A4	mm	SHEET/05
CHK.		DATE		SCALE			
APP.		DATE					