

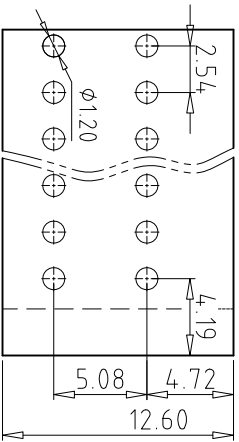
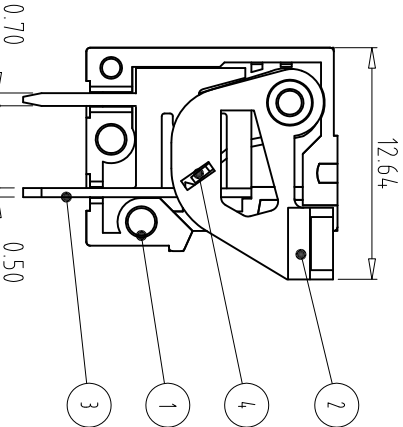
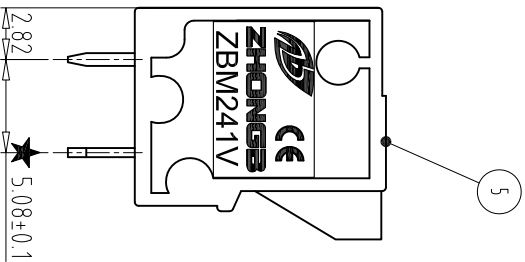


REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	14.09.27

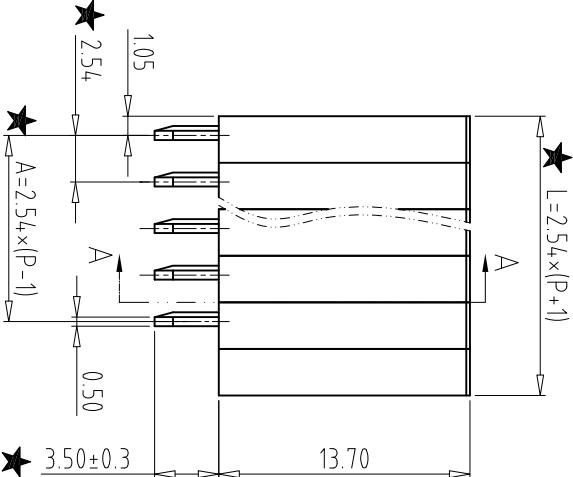

P.C.B LAYOUT



SECTION A-A

- NOTES:
- 1.Rating:150V 2A,
 - 2.Insulation Withstands Voltage: AC1300V/MIN;
 - 3.Insulation Resistance: $\geq 500M \Omega$ or more at DC500V
 - 4.Using Temperature Range: -40°C/+105°C
 - 5.Suitable Electric Wire: 20-26 AWG
 - 6."★"The important dimension.

P	2	3	4	5	6	7	8	9	10	11	12	13	14	15
DIM	L	7.62	10.16	12.7	15.24	17.78	20.32	22.86	25.4	27.94	30.48	33.02	35.56	38.1
A	2.54	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	25.4	27.94	30.48	33.02	35.56
P	16	17	18	19	20	21	22	23	24	25	26	27	28	29
DIM	L	4.318	4.572	4.826	5.08	5.334	5.588	5.842	6.096	6.35	6.604	6.858	7.112	7.366
A	38.1	40.64	43.18	45.72	48.26	50.8	53.34	55.88	58.42	60.96	63.5	66.04	68.58	71.12

Total Pitch Tolerances		Nominal dimension range	
in mm		in mm	
over	over	over	over

0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	over
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3

5	END COVER	ZM241A3XXXX	1	PA66(V0)	
4	SPRING COIL	ZM241B0003	P	STAINLESS	
3	SOLDER PIN	ZM241B0001	P	BRASS	Tin Plated
2	LEVER	ZM241A2XXXX	P	POM(V2)	
1	HOUSING	ZM241A0XXXX	P	PA66(V0)	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	14.09.27	SIZE	A4
CHK	DATE			SCALE	2:5.1
APP.	DATE				141V
				NAME	ZBM241V-XXP-X
				DWGNO.	ZB-02-ZBM241VXXPX