

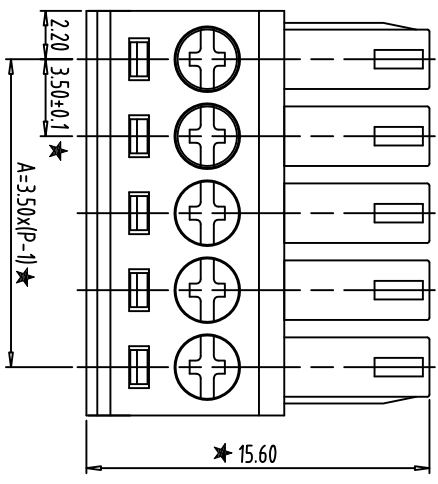
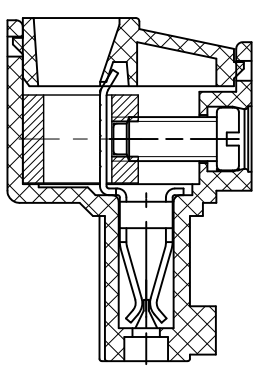
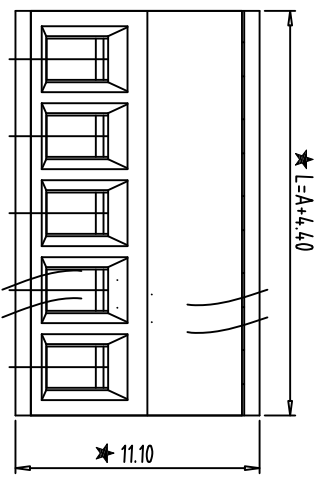


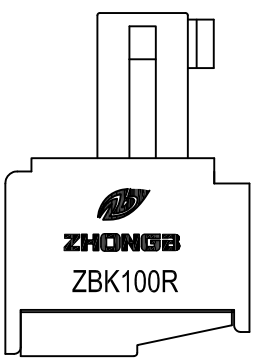

- NOTES:
- 1.Rating:300V 8A ;
 - 2.Insulation Withstands Voltage: AC2000V/MIN
 - 3.Insulation Resistance: 500MΩ or more at DC500V
 - 4.Using Temperature Range:-40°C---+105°C
 - 5.Screw Torque Vlaue: 1.7 lbf.in
 - 6.Suitable Electric Wire:28-16AWG
 - 7."★" is the important dimension.

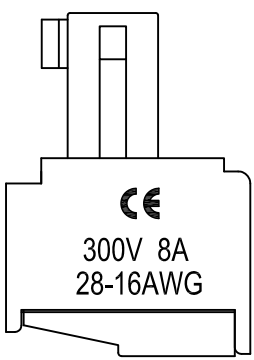

DIM	P	2	3	4	5	6	7	8	9	10	11	12	****
L	7.90	11.40	14.90	18.40	21.90	25.40	28.90	32.40	35.90	39.40	42.90	****	
A	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	****	

A		Total Pitch Tolerances										Nominal dimension range										+		=		-		//														
		in mm										in mm																														
over	0	over	30	over	53	over	70	over	90	over	115	over	150	over	250	over	350	over	0	over	30	over	53	over	70	over	90	over	115	over	150	over	200	over	250	over	0	over	100	over	150	
to	30	to	53	to	70	to	90	to	115	to	150	to	250	to	350	to	500	to	30	to	53	to	70	to	90	to	115	to	150	to	200	to	250	to	320	to	10	to	100	to	150	
±0.18? 2.0	±0.25	±0.3	±0.35? 4.4	±0.60	±0.70? 8.5	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5																						

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE			
DWG.	SK	DATE	2014/11/08	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	3-1 15EDG-3.5				
APP.		DATE		ZBK100R-XXP-XC					
NAME									
DWGNO				ZB-02-ZBK100RXXPX5					