
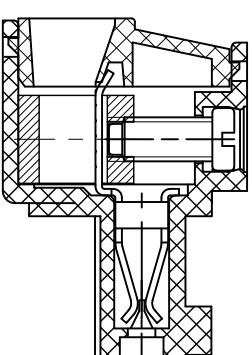
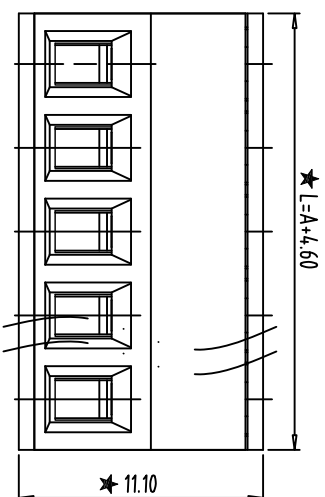
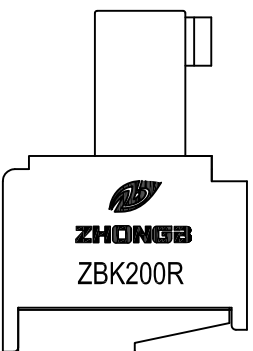
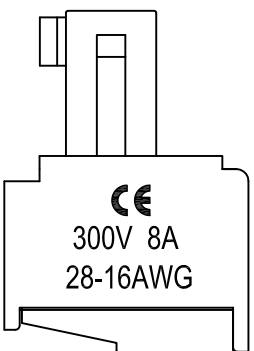
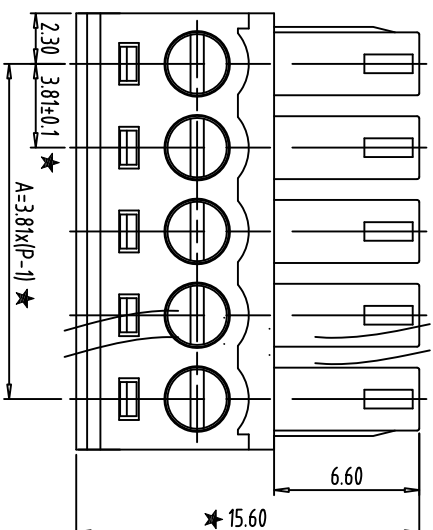


| REV  | CONTENT | CHK | DATE       |
|------|---------|-----|------------|
| V0.0 | CONTENT | ZX  | 2020/03/31 |

## NOTES:

- 1.Rating:300V 8A ;
- 2.Insulation Withstands Voltage: AC2000V/MIN
- 3.Insulation Resistance: 500MΩ or more at DC500V
- 4.Using Temperature Range:-40°C--+105°C
- 5.Screw Torque Vlaue: 1.7 lbf.in
- 6.Suitable Electric Wire:14-24AWG
- 7."★" is the important dimension.

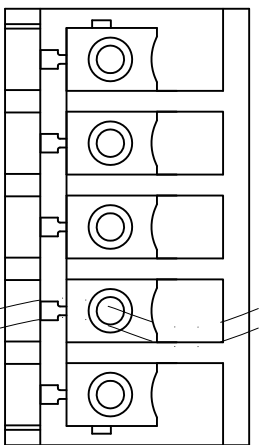

| Total Pitch Tolerances |  |  |  |  |  |  |  |  |  | Nominal dimension range |  |  |  |  |  |  |  |  |  | ± | ≡ | — | // |
|------------------------|--|--|--|--|--|--|--|--|--|-------------------------|--|--|--|--|--|--|--|--|--|---|---|---|----|
| in mm                  |  |  |  |  |  |  |  |  |  | in mm                   |  |  |  |  |  |  |  |  |  |   |   |   |    |

|      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over | over |
| 0    | 30   | 53   | 70   | 90   | 115  | 150  | 250  | 350  | 0    | 30   | 53   | 70   | 90   | 115  | 150  | 200  | 250  | 0    | 10   | all  | 0    | 100  | over |
| to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   | to   |
| 30   | 53   | 70   | 90   | 115  | 150  | 250  | 350  | 500  | 30   | 53   | 70   | 90   | 115  | 150  | 200  | 250  | 320  | 10   | 100  | 150  | 150  | 150  | 150  |

|       |       |      |       |       |       |       |       |       |       |       |       |       |       |       |       |       |     |     |     |     |     |     |     |
|-------|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|-----|-----|-----|-----|-----|-----|
| ±0.18 | ±0.25 | ±0.3 | ±0.35 | ±0.44 | ±0.60 | ±0.70 | ±0.85 | ±0.20 | ±0.25 | ±0.30 | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.80 | ±0.90 | 0.2 | 0.3 | 0.3 | 0.2 | 0.3 | 0.3 | 0.5 |
|-------|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|-----|-----|-----|-----|-----|-----|

| ITEM | NAME OF PART | NO. OF PART | Q'TY       | MATERIAL | NOTE           |
|------|--------------|-------------|------------|----------|----------------|
| DWG. | ZX           | DATE        | 2020/03/31 | SIZE     | A4             |
| CHK. | DATE         | DATE        |            | SCALE    | 3:1            |
| APP. | DATE         |             |            | NAME     | ZBK200R-XXP-XS |

|        |                    |   |
|--------|--------------------|---|
| DWGNO. | ZB-03-ZBK200RXXPXS | 1 |
|--------|--------------------|---|