
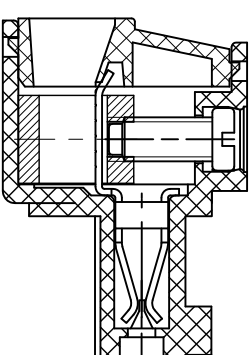
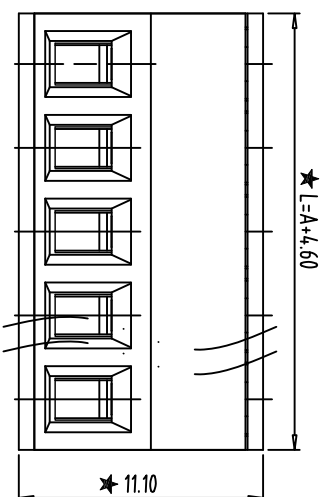
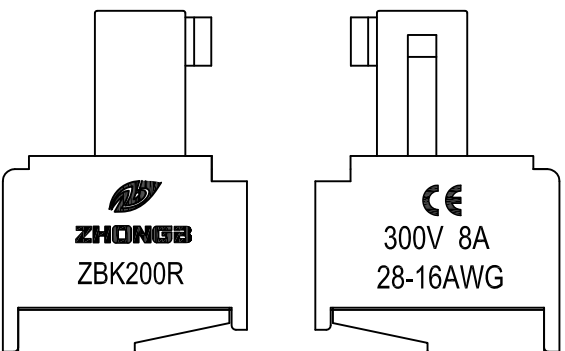
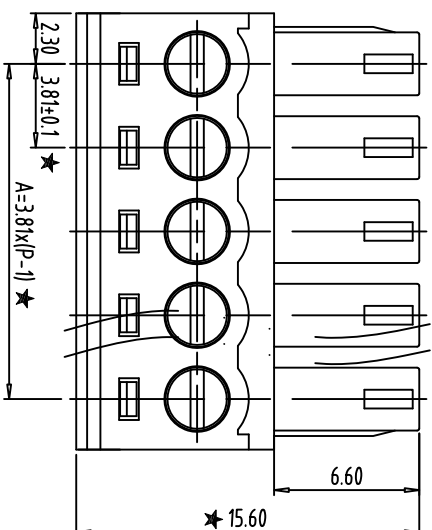


REV	CONTENT	CHK	DATE
V0.0	CONTENT	ZX	2020/03/31

NOTES:

- 1.Rating:300V 8A ;
- 2.Insulation Withstands Voltage: AC2000V/MIN
- 3.Insulation Resistance: 500MΩ or more at DC500V
- 4.Using Temperature Range:-40°C--+105°C
- 5.Screw Torque Vlaue: 1.7 lbf.in
- 6.Suitable Electric Wire:14-24AWG
- 7."★" is the important dimension.

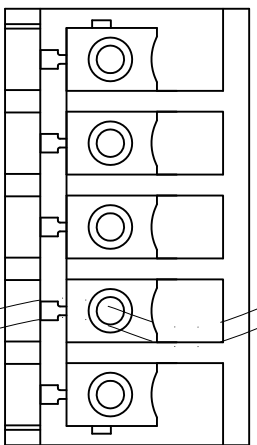

Total Pitch Tolerances										Nominal dimension range										±	≡	—	//
in mm										in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	10	all	0	100	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	100	150	150	150	150

±0.18	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.5
-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-----	-----	-----	-----	-----	-----	-----

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZX	DATE	2020/03/31	SIZE	A4
CHK.	DATE	DATE		SCALE	3:1
APP.	DATE			NAME	ZBK200R-XXP-XS

DWGNO.	ZB-03-ZBK200RXXPXS	1
--------	--------------------	---