
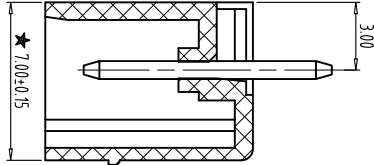
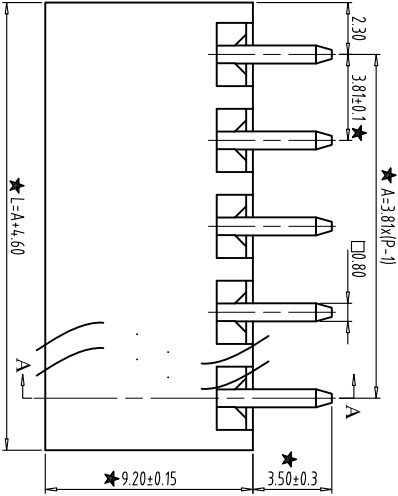
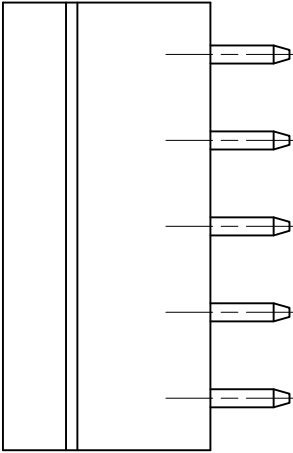



REV	CONTENT	CHK	DATE
V0.0	CONTENT	ZX	2020.06.19

- NOTES:
- Rating:300V 8A ,
 - Insulation Withstands Voltage: AC2000V/MIN
 - Insulation Resistance: 500MΩ or more at DC500V
 - Using Temperature Range: -40°C--+105°C
 - 5."★" is the important dimension

PCB LAYOUT
S=3:1

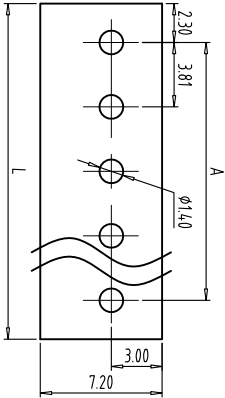

SECTION:A-A

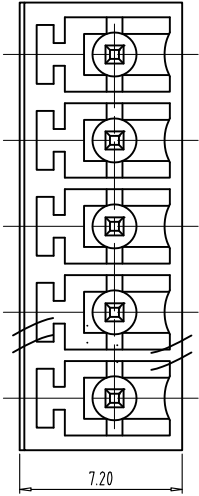

Total Pitch Tolerances										Nominal dimension range										±	≡	—	//
in mm										in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	250	350	500	0	30	53	70	90	115	150	200	250	0	10	all	0	100
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	100	150	150	150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5
6										5										4			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZX	DATE	SIZE	A4	15EDG-3.81
CHK	DATE	SCALE	4:1		
APP	DATE	NAME	ZBF200V-XXP-X		

DWGNO.	ZB-02-ZBF200VXXPX
--------	-------------------