







REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014/08/19

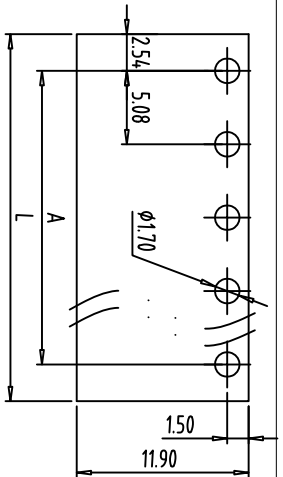

PCB LAYOUT
S=2:1

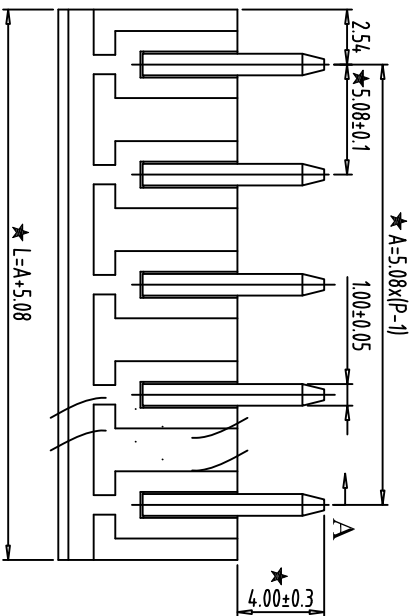

- NOTES:
1. Rating:300V 15A ;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40℃~+105℃
 5. "★" is the important dimension
 6. RoHS compliance

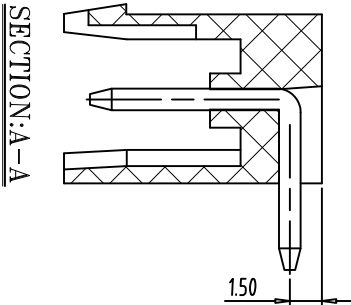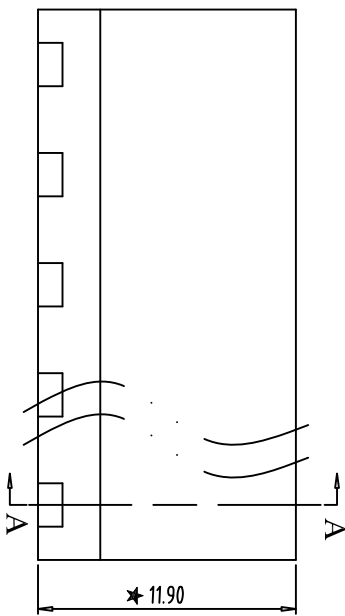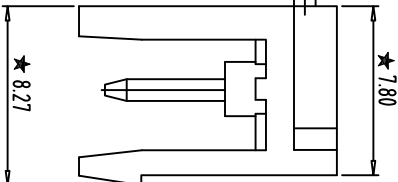

SECTION:A-A

Total Pitch Tolerances		Nominal dimension range															—	—	//
		in mm																	
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	0	over	
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	320	10	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3
6									5									4	0.3
																			0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	2014/08/19	SIZE A4	UNITS mm
CHK.	DATE			SCALE 3:1	SHEET/OF 1 / 1
APP.	DATE			NAME	

ZBF400R-XXP-X