



REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014/08/19



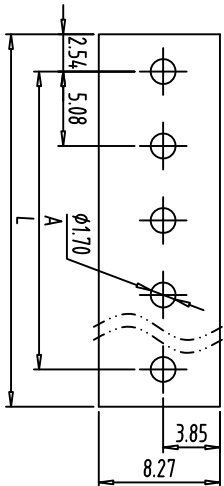


PCB LAYOUT
S=2:I

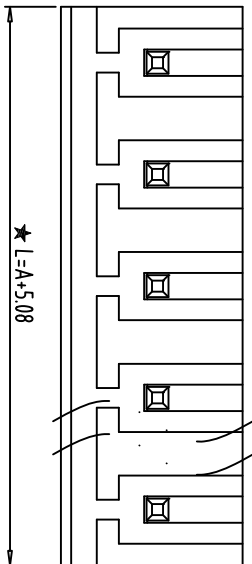


NOTES:

1. Rating:300V 15A ;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: 500MΩ or more at DC500V
4. Using Temperature Range: -40°C~+105°C
5. “★” is the important dimension
6. RoHS compliance

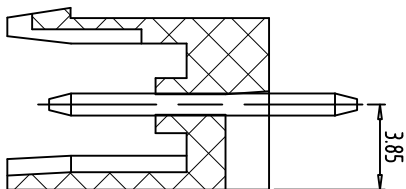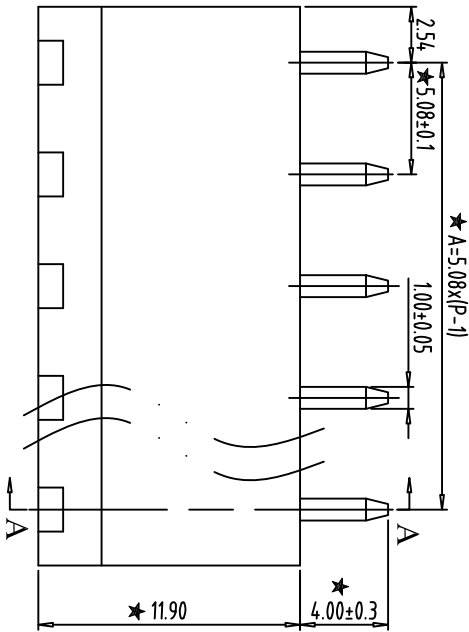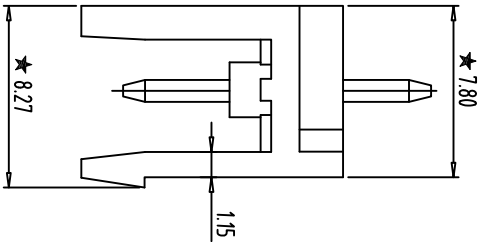

SECTION:A-A

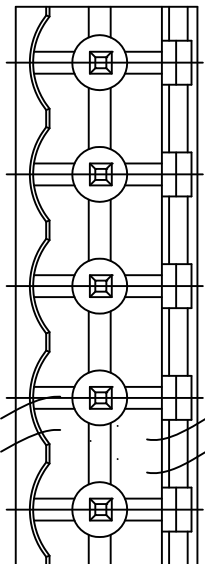

Total Pitch Tolerances												Nominal dimension range												+	±	-	//
in mm												in mm												+	±	-	//

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over	0	over	0	over	0	over	0	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	10	all	100	150	100	150	100	150	100	
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5	0.5		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE			
DWG.	SK	DATE	2014/08/19	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE		3:1	2EDG-5.08		
APP.		DATE		ZRE400V YYP X					

DWGNO.	ZB-02-ZBF400VXXPX
--------	-------------------