
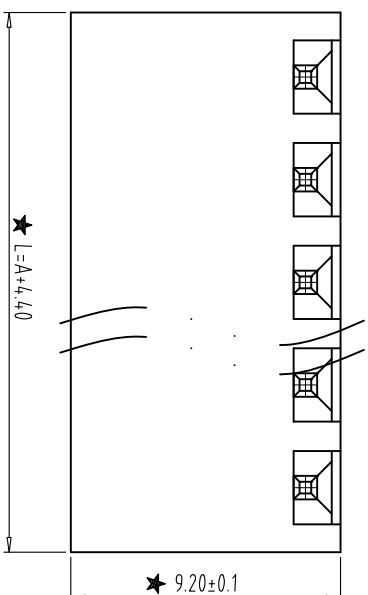





REV	CONTENT	CHK	DATE
V0.0	CONTENT	ZX	2020.05.22

NOTES:

- 1.Rating:300V 8A ,
- 2.Insulation Withstands Voltage: AC2000V/MIN
- 3.Insulation Resistance: 500M Ω or more at DC500V
- 4.Using Temperature Range: -40°C--+105°C
- 5."★" is the important dimension

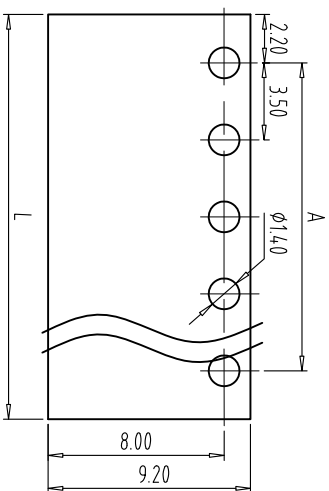

PCB LAYOUT

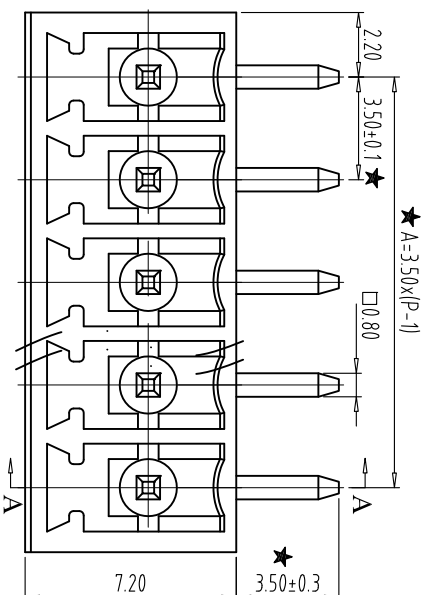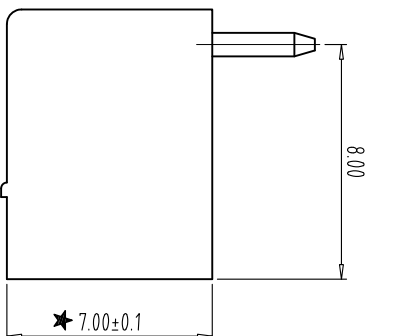

SECTION:A-A

A	Total Pitch Tolerances in mm	Nominal dimension range in mm	⊥ ≡ — //
---	---------------------------------	----------------------------------	---

[illegible]

2	PIN	ZF100B0002	P	BRASS	Sn Plated
1	HOUSING	ZF100A0XXXX	1	PA66(V0)	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZX	DATE 2020.05.22	SIZE	A4	UNITS mm
CHK		DATE	SCALE	4:1	15EDG-3.5(0.8*12.5)
APP.		DATE			
			NAME ZBF100R-XXP-X		
			DWGNO ZB-02-ZBF100RXXPX		