

1

2

3

4

5





6

A

B

C

D

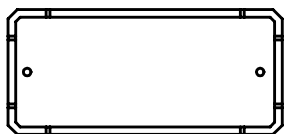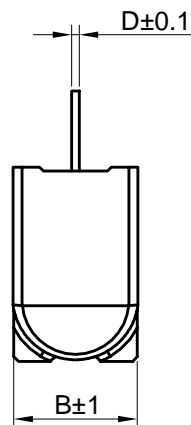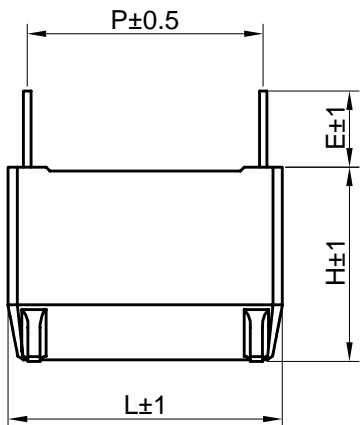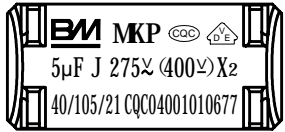

Part No.	1B550D400-51	
Rated Capacitance	5µF	
Capacitance tolerance	±5%/J	
Rated voltage	275VAC/400VDC	
Rated frequency	50/60Hz	
Dissipation factor	≤0.0007(1kHz 1V)	
V <sub>T-T</sub> (terminal and terminal)	2Un/10s	
V <sub>T-C</sub> (terminal and case)	≥2300VAC	
Insulation resistance (250VDC 60s)	≥3000M Ω ·µF	
Voltage acceleration	30V/us (dV/dt)	
Ambient temperature	40/105/21	
Discombustibility class	UL94V-0	
Long (L)	36	
Broad (B)	17	
High (H)	25	
Lead type(D)	Ø1.0	
I <sub>rms</sub> =10A ΔT≤15°C	Length of lead(E)	10
	Distance of lead (P)	31

<b>FONGMING ELECTRONIC SCIENCE &amp; TECH. CO., LTD</b>							
Name of product	Induction heating capacitors				Name of part	Product Drawing	
		LiangDewen	ZhengJinghu	YangJie	F1029	Drawing No.	TZ-1B550D400-51D
scale	plot	design	auditing	authorize	date		

1

2

3

4

5

6