

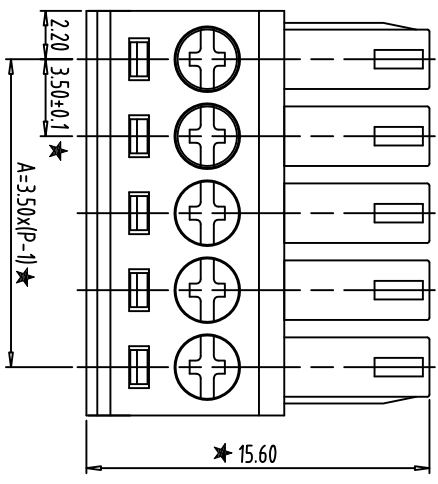
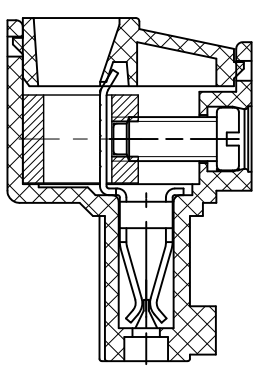
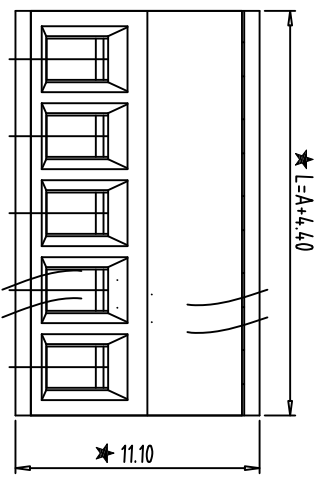


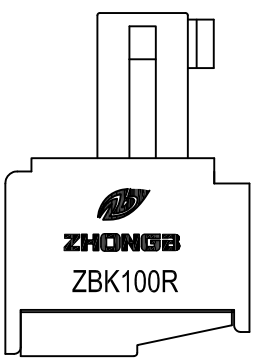

- NOTES:
- 1.Rating:300V 8A ;
 - 2.Insulation Withstands Voltage: AC2000V/MIN
 - 3.Insulation Resistance: 500MΩ or more at DC500V
 - 4.Using Temperature Range:-40°C---+105°C
 - 5.Screw Torque Vlaue: 1.7 lbf.in
 - 6.Suitable Electric Wire:28-16AWG
 - 7."★" is the important dimension.

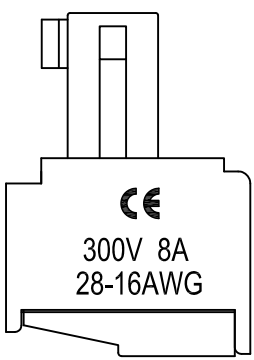

DIM	P	2	3	4	5	6	7	8	9	10	11	12	****
L	7.90	11.40	14.90	18.40	21.90	25.40	28.90	32.40	35.90	39.40	42.90	****	
A	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	****	

A		Total Pitch Tolerances										Nominal dimension range										T		≡		—		//			
		in mm										in mm																			
over	0	over	53	70	90	115	150	250	350	500	over	0	30	53	70	90	115	150	200	250	320	over	0	over	10	all	over	0	100	over	150
to	30	to	70	to	90	to	to	to	to	to	to	30	53	70	90	115	150	200	250	320	to	10	to	10	to	100	to	100	to	150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5								
		6										5												4							

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE				
DWG.	SK	DATE	2014/11/08	SIZE	A4	UNITS	mm	SHEET/OF	1/1
CHK		DATE		SCALE	3:1				15EDG-3.5
APP.		DATE							
				NAME	ZBK100R-XXP-XC				
				DWGNO.	ZB-02-ZBK100RXXPX5				