
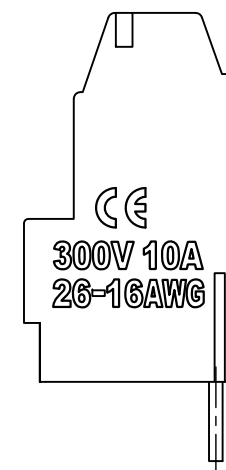
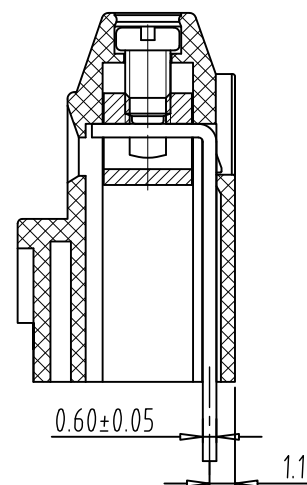


NOTES:

1. Rating:300V 10A;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range: -40°C/+105°C
5. Screw Torque Value:0.2N.m
6. Suitable Electric Wire: 16-26AWG
- 7, "★" the important dimension.

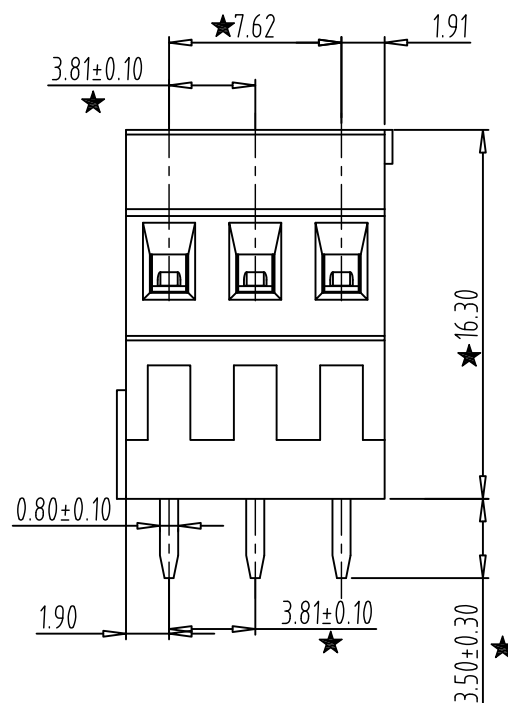

SECTION:A-A

A	Total Pitch Tolerances								Nominal dimension range										$\perp$		$\equiv$		---		$//$	
	in mm								in mm																	
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500		to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10			to 100	to 150		
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5	

ITEM		NAME OF PART		NO. OF PART		Q"TY		MATERIAL			NOTE	
DWG.		ZX	DATE	2020.08.31		SIZE		A4	UNITS	mm	SHEET/OF	1 / 1
CHK.			DATE			SCALE		3 : 1		128-3.81高位		
APP.			DATE			NAME		ZB012H-03P-XC				
 ZHONGB NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD						DWGNO.		ZB-02-ZB012HXXPXC				