




2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	ZX	2020.05.22

NOTES:


1. Rating: 300V 8A ,
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: 500M Ω or more at DC500V
4. Using Temperature Range: -40°C--+105°C
5. ★ " is the important dimension

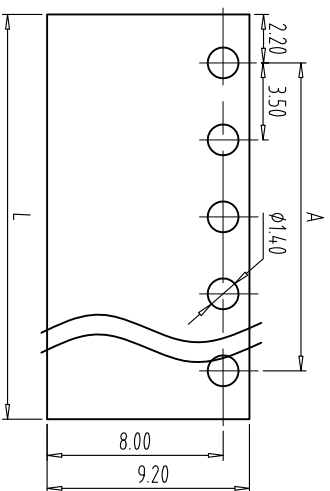

PCB LAYOUT

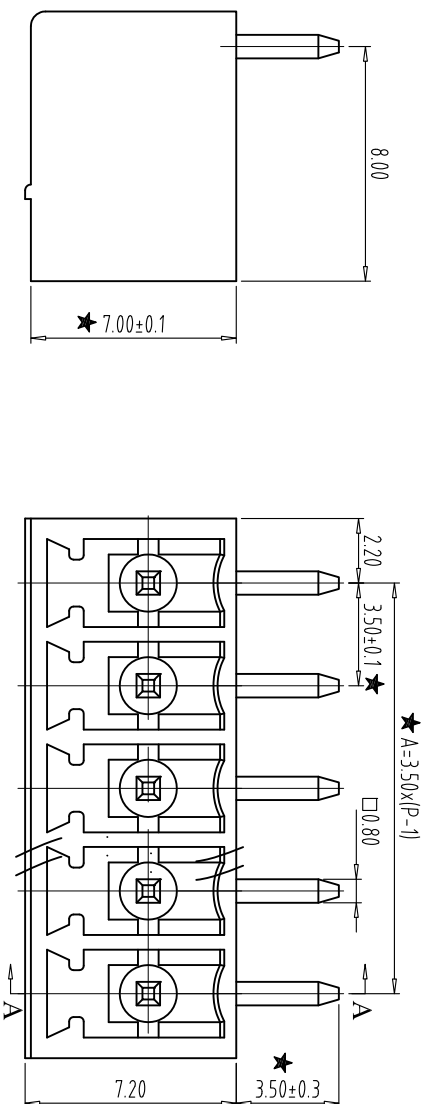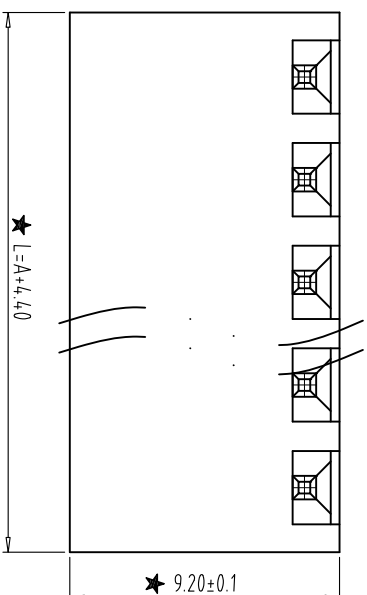

SECTION:A-A



A	Total Pitch Tolerances in mm	Nominal dimension range in mm	Tolerance symbol
			-
			//

2	PIN	ZF100B0002	P	BRASS	Sn Plated
1	HOUSING	ZF100A0XXXX	1	PA66(V0)	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZX	DATE	2020.05.22	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	4:1 15EDG-3.5(0.8*12.5)
APP.	DATE		NAME	ZBF100R-XP-X	