
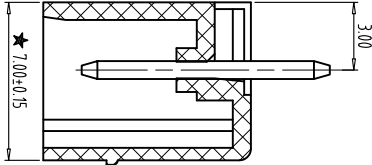
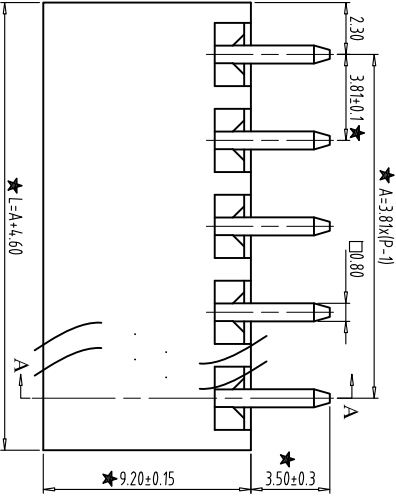
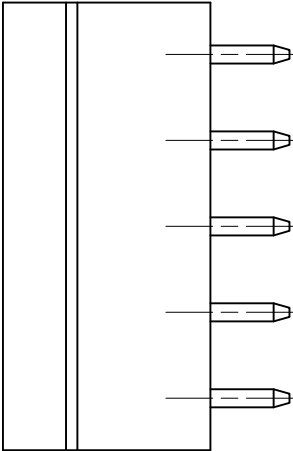


FILE: ZB02/		REV		CONTENT		CHK	DATE
		V0.0		CONTENT		ZX	2020.06.19


- NOTES:
- 1.Rating:300V 8A ,
 - 2.Insulation Withstands Voltage: AC2000V/MIN
 - 3.Insulation Resistance: 500MΩ or more at DC500V
 - 4.Using Temperature Range: -40°C--+105°C
 - 5."★" is the important dimension

PCB LAYOUT

S=3:1

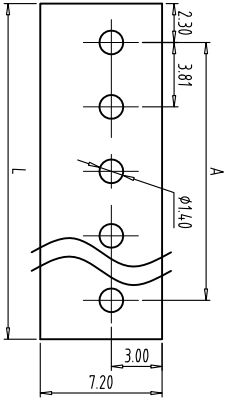

SECTION:A-A

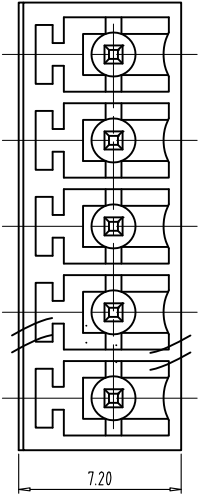

Total Pitch Tolerances		Nominal dimension range												+	±	-	//
		in mm															

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	250	350
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	250	320	10
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90
0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE			
DWG.	ZX	DATE	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.	DATE	DATE	SCALE	4:1	15EDG-3.81			
APP.	DATE			ZBF200V- VYP Y				



NINGBO ZHONGBO PHOTOVOLTALIC TECHNOLOGY CO., LTD

DWGNO. ZB-02-ZBF200VXXPX