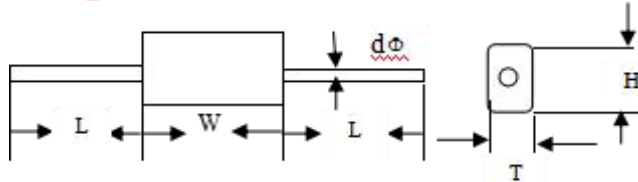


Customer:TRIATRON

Customer'S

JGS"S P/N:CL20A TR

Capacitance 容量	@ 1KHZ 23°C±3°C	Tolerance 误差	±5%	Rated Voltage 额定电压	@ 25°C 50/60HZ	DRAWING &MARKING	Protection/Coating 外封装	Flame retardant epoxy resin (UL94V-0)						
					250V		Resin filled 灌封							
Dielectric 介质	Polyseter film	Plates 导体	Metallized film	Construction 结构	Winding		Lead Wire 导线	Φ 0.8tinned steel wires						
Dissipation Factor 损失角	@ 1K HZ 1Vrms 25°C max		50~60HZ				Colour 颜色	yellow						
			1KHZ	1.00%										
			10KHZ	1.50%										
			150KHZ											
Test Voltage 测试电压	1.6 times of rated voltage for 5 seconds cut off current at 10mA		DC lead to lead	...400VDC										
			DC lead to case	VDC										
			AC lead to lead	VAC										
			AC lead to case	VAC										
Dielectric Withstanding Voltage 介质耐压强度	Between terminals 250V 200% 1To 5 sec max			500VDC										
Insulation Resistance 绝缘阻抗	20°C@ 100 VDC 60 seconds min		Lead to lead											
	20°C@.....VDC..... seconds min		Lead to case	MΩ										
dv/dt 单位时间电压变化率	max		Max pulse rise time	(v/sec)										
IpeakA 最大值电流	@70°C			Amps										
IrsmA 实数值电流	@70°C			Amps										
Surge/Pulse voltage 冲击电压	140% rated voltage max			VDC										
E.S.R 等效串联阻联阻抗值			Standard 依循标准											
Safety approval安 规认证			Dimension(尺寸)mm											
			W(±0.5)	H(±0.5)	T(±0.5)	P								
			dø(±0.05)	L(±3.0)										
			0.8											
Remark 备注: RoHS			Confirmation area 客户承认签回区			Operating Temperature 工作温度范围 From Minus -40 °C to Plus +125°C		Designer 设计师 丁亚维						
						DATE 日期: 2025-02-10		Design code 设计代码: CL20A 206J250V TR						
						3RD ANGLE PROJECTION 第三角法		Drawing 绘图员 陈晓玉	Appoval 核准					
						SCALE	~							
						UNIT	mm	Drawing NO.						

单位: mm