


FILE: ZB02/

REV






CONTENT

CHK

DATE



PCB LAYOUT
S=1.5:1

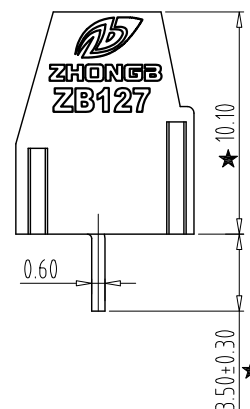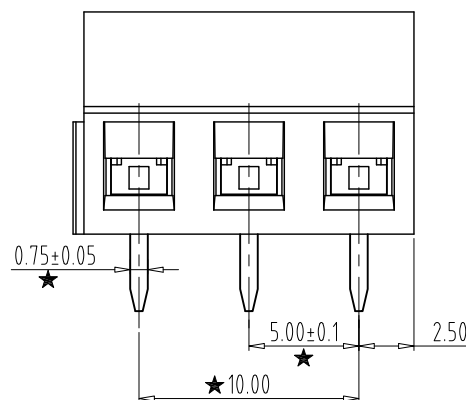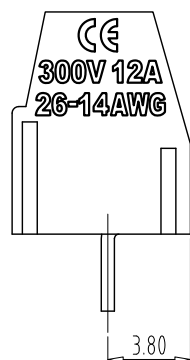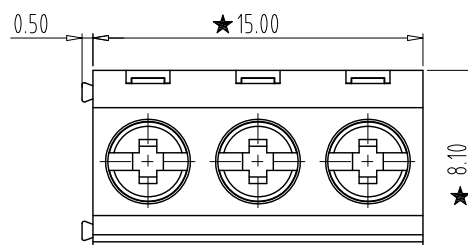

SECTION:A-A

NOTES:

1. Rating:300V 12A;
2. Insulation Withstands Voltage:AC2000V/MIN;
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range: -40°C/+105°C;
5. Screw Torque Vlaue:0.4N.m;
6. Suitable Electric Wire: 26-14AWG .
7. " ★ " is critical dimension to be controlled.

A	Total Pitch Tolerances in mm									Nominal dimension range in mm										$\perp$		$\equiv$	$—$		$//$
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10							
	± 0.18	± 0.25	± 0.30	± 0.35	± 0.40	± 0.45	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3		0.2	0.3	0.5

ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL			NOTE		
DWG.	ZX	DATE	2020/05/10		SIZE	A4	UNITS	mm	SHEET/OF	1 / 1	
CHK.		DATE			SCALE	3:1		127V-5.00			
APP.		DATE			NAME	ZB127V-03P-XC					
 ZHONGBO					DWGNO.	ZB-01-ZB127VXXPC					
NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD											