

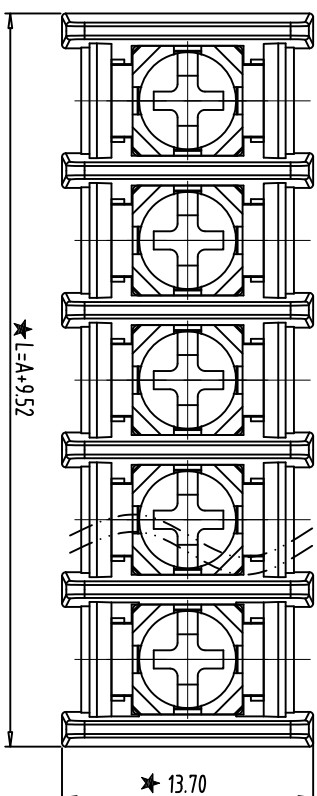
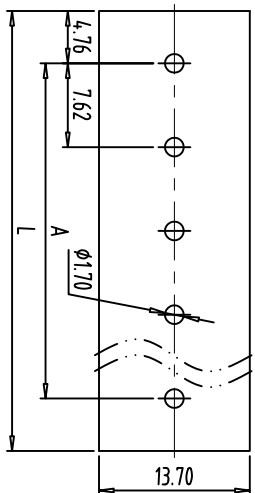
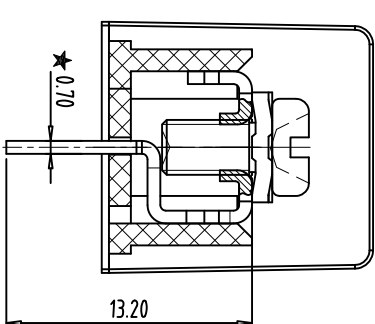


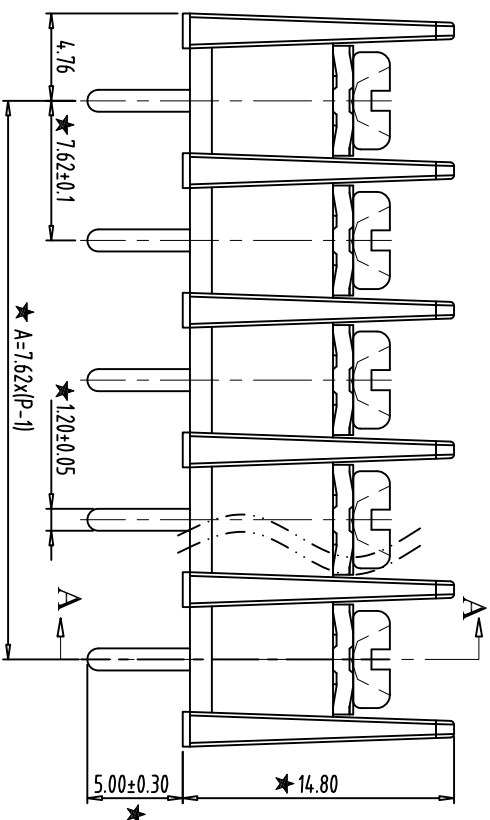

- NOTES:

1. Rating: 300V 20A;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: 500M Ω or more at DC500V
4. Using Temperature Range: -40°C/+105°C
5. Screw Torque Value: 0.5N.m
6. Suitable Electric Wire: 14-22AWG
- 7, "★" the important dimension.

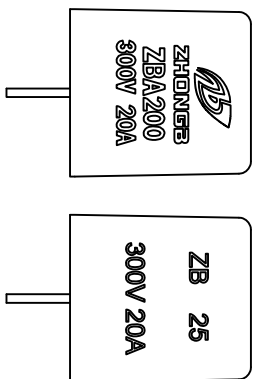

SECTION:A-A

Total Pitch Tolerances	Nominal dimension range	=	-	//
A				

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	ZX	DATE	2020.05.15	SIZE	A4 UNITS mm	SHEET/OF 1 / 1
CHK.	DATE			SCALE	2.5:1	ZB25
APP.	DATE			ZBA200-XXP-XC		
NAME						
DWGNO. ZB-02-ZBA200XXPXC						