

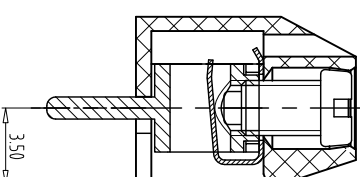
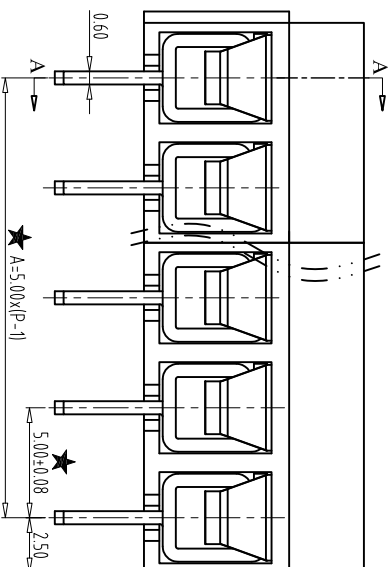
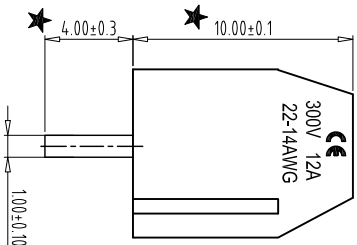
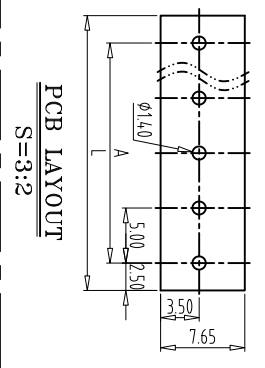


REV	CONTENT	CHK	DATE
V0.0	品名及料号变更	SK	14.05.06

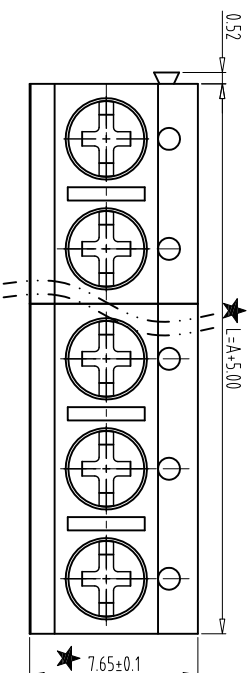

NOTES:

1. Rating: 300V 10A
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: 500M Ω or more at DC500V
4. Using Temperature Range: -40°C--+105°C
5. Screw Torque Value: 0.4N.m
6. Suitable Electric Wire: 22-14AWG
7. "★" is the important dimension.
8. Housing: PBT (UL94-V0);
9. Pin header: Brass, Ni plated;
10. Screw: Steel, Zinc plated;
11. Shrapnel: Stainless steel;

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'ty	MATERIAL	NOTE
DWG.	HUIAO	DATE	UNITS	mm	SHEET/OF 1 / 1
CHK.		DATE	SCALE	3 : 1	A4 
APP.		DATE	NAME	ZB105F-XP-XS(306V)	