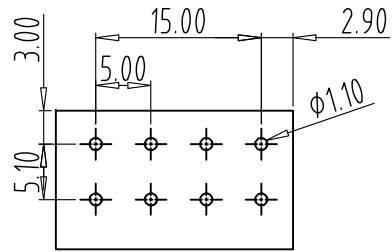
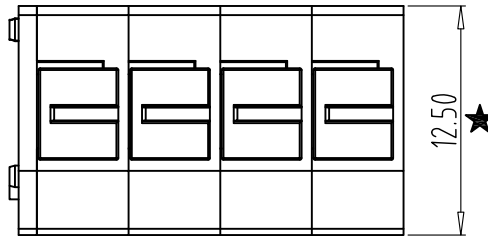
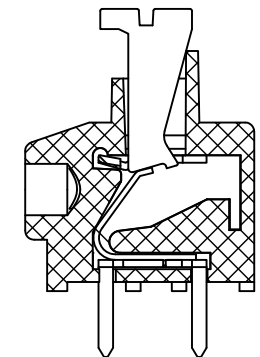
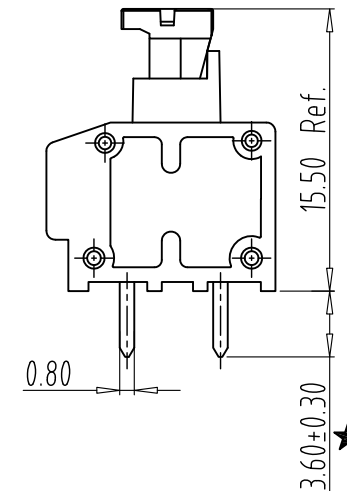
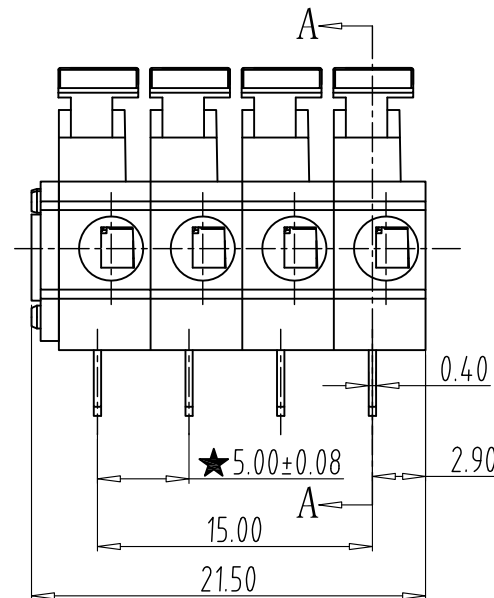
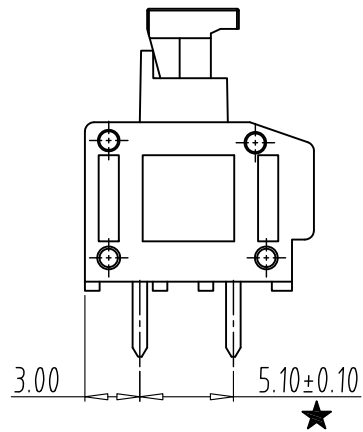


FILE: ZB02/

REV	CONTENT	CHK	DATE
V0.0	CONTENT	ZX	2020.05.26

PCB LAYOUT**NOTES:**

1. Rating:300V 5A;
2. Insulation Withstands Voltage:
AC1600V/MIN;
3. Insulation Resistance:
500M Ω or more at DC500V
4. Using Temperature Range:
-40°C/+105°C;
5. Suitable Electric Wire: 20-18AWG .
6. "★" is critical dimension to be controlled.

SECTION:A-A

Total Pitch Tolerances in mm										Nominal dimension range in mm										$\perp$		$\equiv$		$—$		$//$	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 500 to 1000	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 320 to 1000	over 0 to 10	over 10 all	over 0 to 100	over 100 to 150	over 150			
± 0.18	± 0.25	± 0.30	± 0.35	± 0.40	± 0.45	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5				

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	DATE		SIZE	A4 UNITS mm	SHEET/OF 1 / 1
CHK.	DATE		SCALE	2.5:1	235V-5.0
APP.	DATE				
NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD			NAME	ZBM535V-04P-X	
			DWGNO.	ZB-01-ZBM535VXXPX	