D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	Zengy	09/06/08"
2		边件1中间件1/2改模	HXG	01/09/09"
3	10-0303	增加VDE,CE刻字及参数	Jordan,Y	09/06/10"

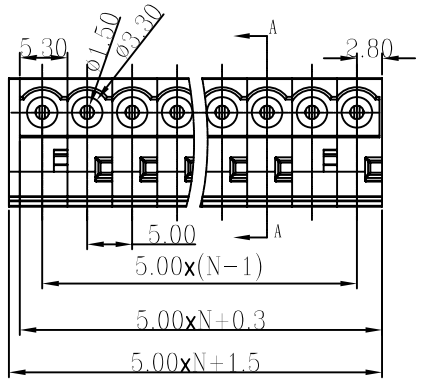



SECTION A-A



*02P



*03P



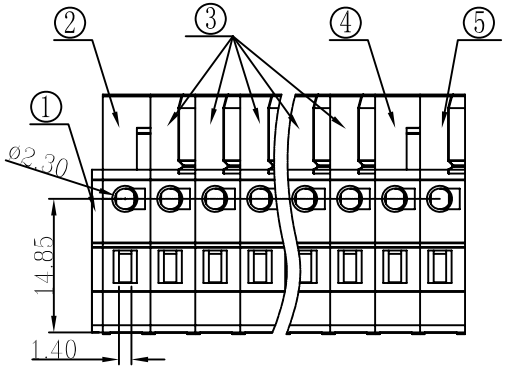



Notes:

1. Pitch:5.0mm ,Poles:XXP
2. Rated voltage/current:UL 300V/15A
   VDE 320V/20A
3. Operation temperatures:-40℃～+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:22～14AWG,2.5mm²
7. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

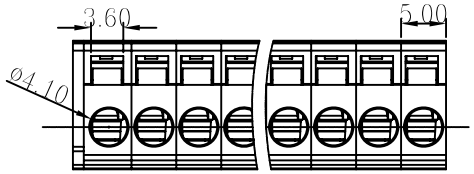

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
2	8EDGK-5.0-HOUSING (边件1)	1086A4101D(H)	1	PA66	UL94V-0
1	8EDGK-5.0-COVER (盖板)	1086C4101A(H)	1	PA66	UL94V-0

7	DG242-SPRING	X000000990(H)	XX	Stainless Steel	
6	8EDGK-CLAMP	1086B00010(H)	XX	Phosphor Bronze	Tin plated
5	8EDGK-5.0-HOUSING (边件2)	1086A4101C(H)	1	PA66	UL94V-0
4	8EDGK-5.0-HOUSING (中间件2)	1086A4101B(H)	1,(XX≥4) 0,(XX≤3)	PA66	UL94V-0
3	8EDGK-5.0-HOUSING (中间件1)	1086A4101A(H)	XX-3,(XX≥4) XX-2,(XX≤3)	PA66	UL94V-0

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM
.0 ±
.00 ±
.000 ±

ANGLES ± 1°

THIRD ANGLE PROJECTION

DFTO ZYH	DATE 07/03/07"	
CHKD	DATE	
MFO	DATE	
APPVL	DATE	
MATERIAL :		
G.E :		
FINISH :		
SCALE : 1:1		

DEGSON®

宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME

8EDGK-5.0-XXP-11-01A(H)

DRAWING NO. 8EDGK-5.0-E02 /PART NO.

SIZE A4 REV T3 09/06/10"

DO NOT SCALE DRAWING

SHEET 1 OF 1